


Front Side Door Trim Panel Replacement (C 100/Long Body)

Tools Required


[KM 475-A](#) Trim Remover

Removal Procedure

1. Lower the front window.

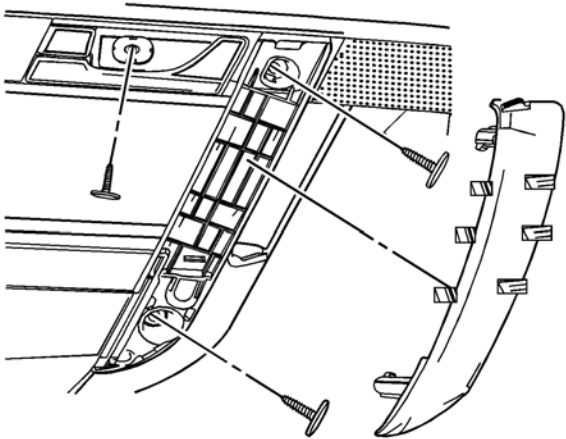


2. Remove the front door handle cover.
3. Remove the front door trim panel screws.

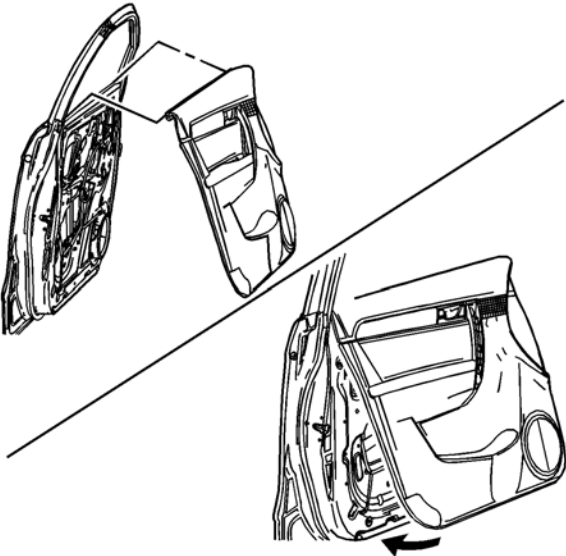

4. Pry off the front door trim panel [KM 475-A](#) .
5. Disconnect the electrical connectors.

Installation Procedure

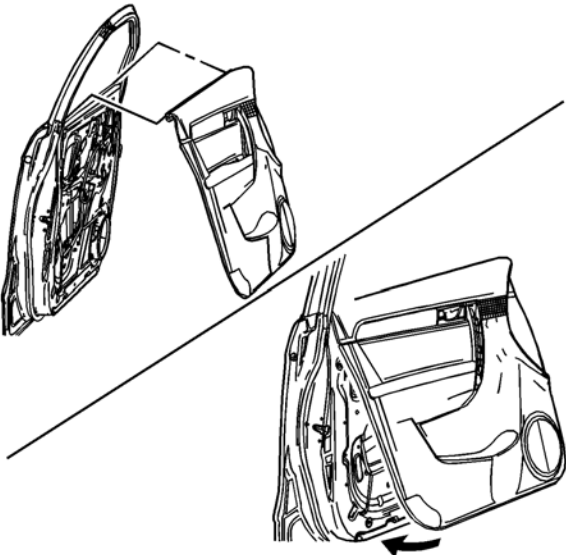

1. Install the front door trim panel.
2. Connect the electrical connectors.

Notice: Refer to [Fastener Notice](#) in the Preface section.