



1. Connect the electrical connectors.
2. Install the rear door inner handle cable.
3. Install the rear door trim panel.

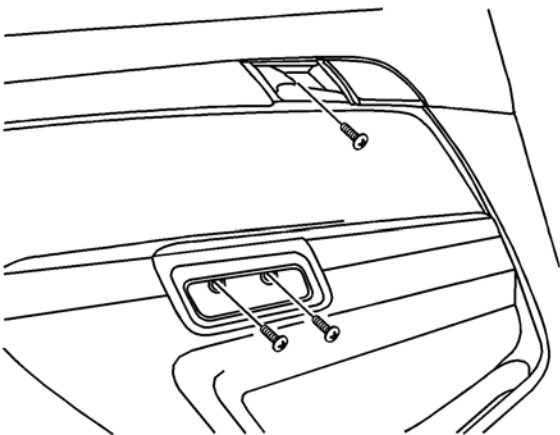

4. Install the rear door trim screws.

Tighten

Tighten the rear door trim screws to 3 N·m (27 lb in).

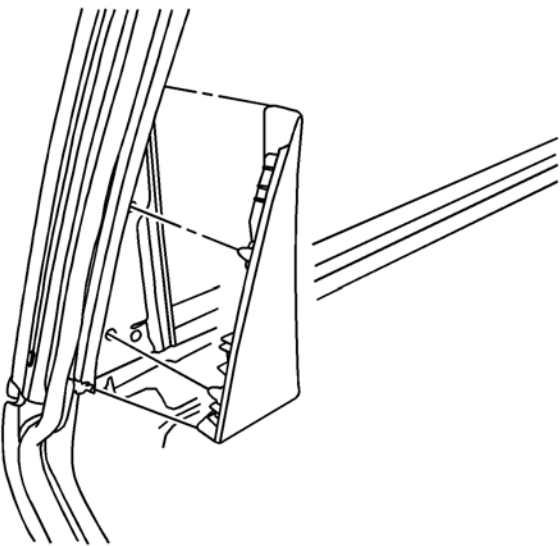

5. Install the rear door upper trim panel.
6. Raise the rear window.