



Console Replacement

Removal Procedure


Caution: Refer to [Battery Disconnect Caution](#) in Cautions and Notices.

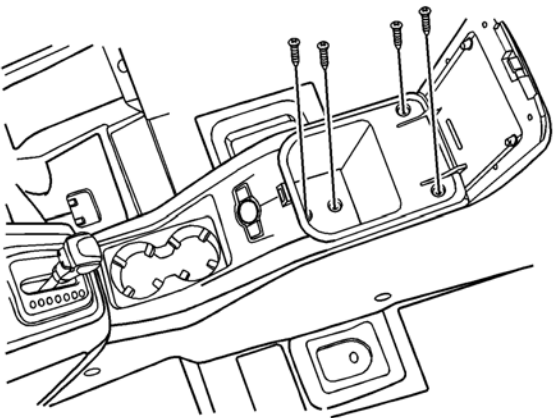

1. Disconnect the negative battery cable. Refer to [Battery Negative Cable Disconnection and Connection](#) .
2. Remove the instrument compartment lower. Refer to [Instrument Panel Lower Compartment Replacement](#) .
3. Remove the radio. Refer to [Radio Replacement](#) .
4. Remove the front seats. Refer to [Bucket Seat Replacement](#)
5. Remove the screws and cup holder, console cover.

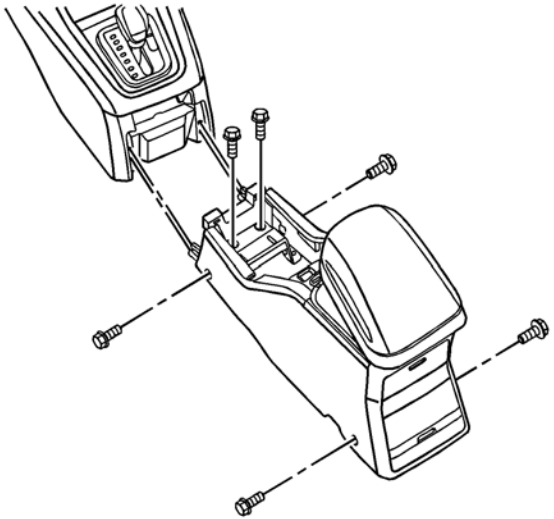

6. Disconnect the electrical connector.
7. Remove the bolts from the floor console.
8. Remove the instrument panel storage compartment. Refer to [Instrument Panel Storage Compartment Replacement](#) .

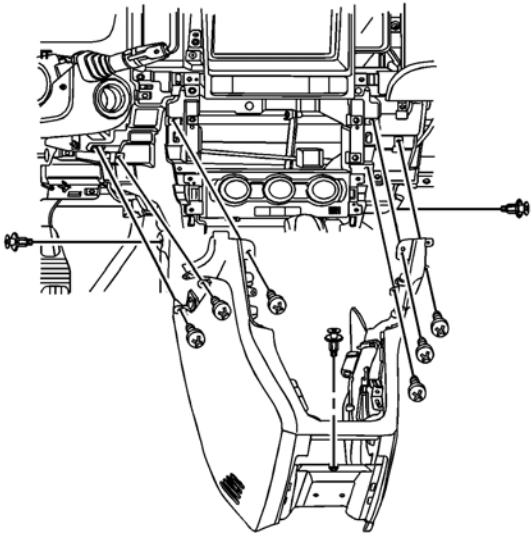

9. Remove the floor console.
10. Remove the screws from the front console retainer.

Installation Procedure