



- 13. Remove the front suspension crossmember support bracket to body bolts.
- 14. Lower the front suspension crossmember slowly with care. Rotate the stabilizer shaft and tie rod properly to have enough space during lowering the cradle.

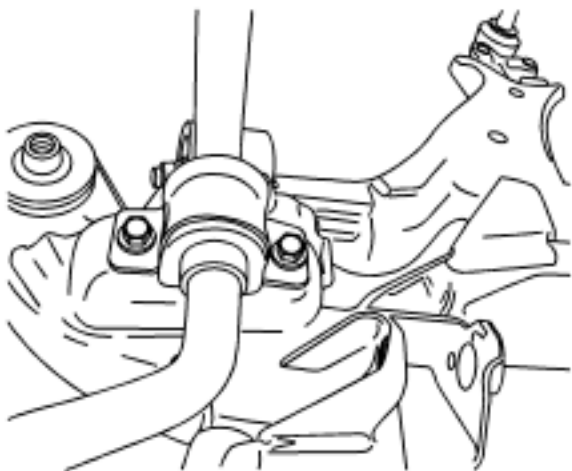

- 15. Remove the stabilizer shaft clamp to front suspension crossmember bolts.
- 16. Remove the control arm to front suspension crossmember bolts and nuts. Refer to [Lower Control Arm Replacement](#).

**Installation Procedure**

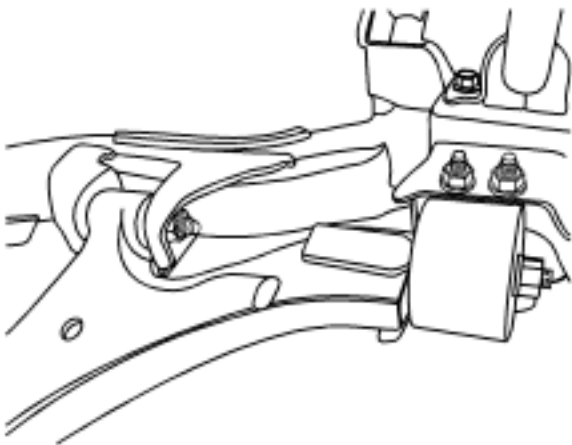

- 1. Install the front control arm to front suspension crossmember bolts and nuts. Refer to [Lower Control Arm Replacement](#).

**Notice:** Refer to [Fastener Notice](#) in Cautions and Notices.