


Instrument Panel Lower Trim Panel Replacement - Left Side

Removal Procedure


Important: Left - Hand Drive Shown, Right - Hand Drive Similar.

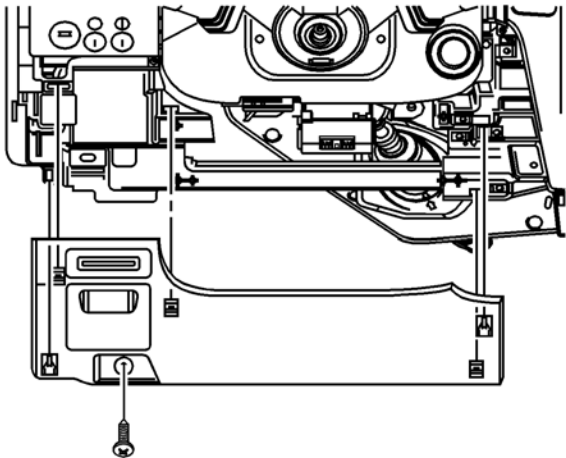

1. Remove the hood prime latch release handle. Refer to [Hood Latch Release Cable Replacement](#) .
2. Remove the screw and the instrument panel lower left trim.

Installation Procedure

Notice: Refer to [Fastener Notice](#) in Cautions and Notices.

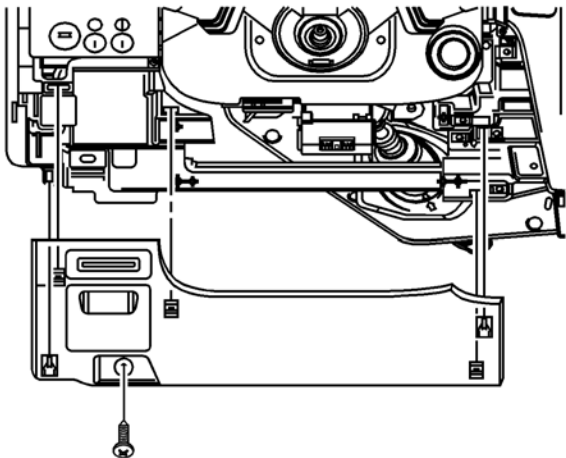

1. Install the instrument panel lower left trim.

Tighten
Tighten the instrument panel steering column opening pillar screw to 2 N·m (18 lb in).

2. Install the hood prime latch release handle. Refer to [Hood Latch Release Cable Replacement](#) .