



# Sunroof Replacement


## Removal Procedure

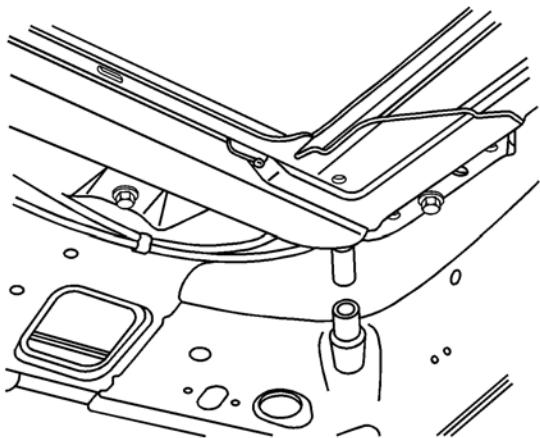

1. Disconnect the negative battery cable. Refer to [Battery Negative Cable Disconnection and Connection](#) .
2. Remove the headliner. Refer to [Headlining Trim Panel Replacement](#) .
3. Remove the drain hoses.

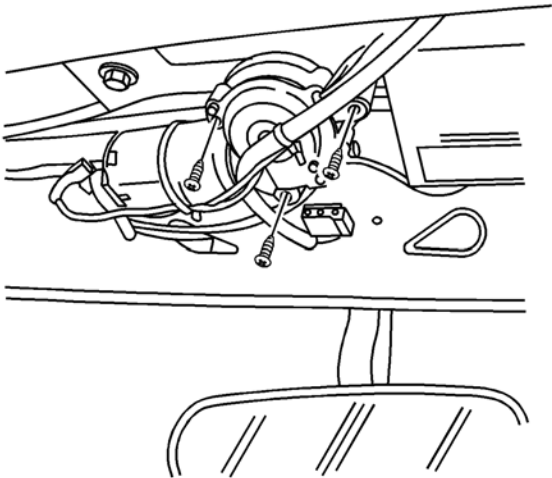

4. Disconnect the electrical connectors.
5. Remove the screws and the motor.

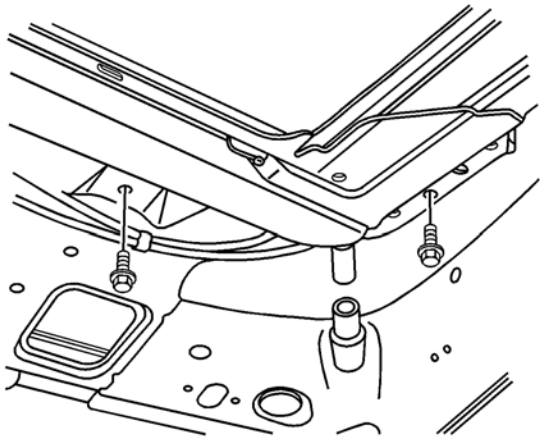

6. Remove the motor control module.
7. Remove the bolts and the housing from the vehicle.