



# Radio Replacement

## Removal Procedure

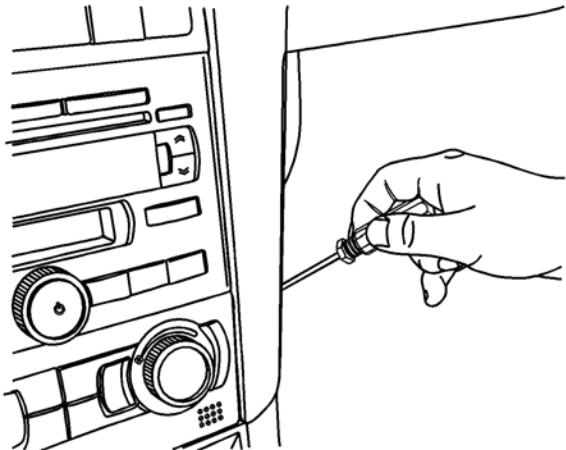


1. Disconnect the negative battery cable.
2. Remove the I/P center trim panel.

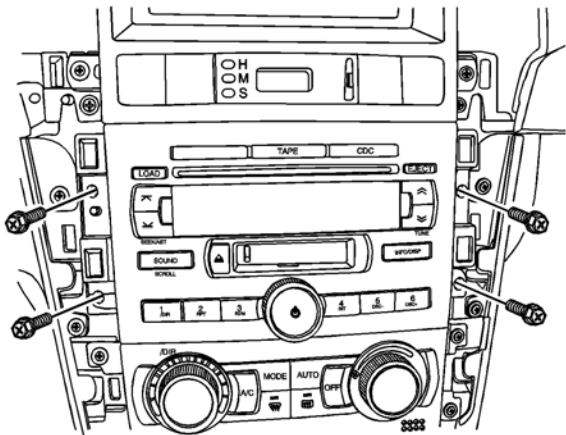

3. Remove the screws and the audio system.
4. Disconnect the audio system electrical connectors.

## Installation Procedure

**Notice:** Refer to [Fastener Notice](#) in Cautions and Notices.

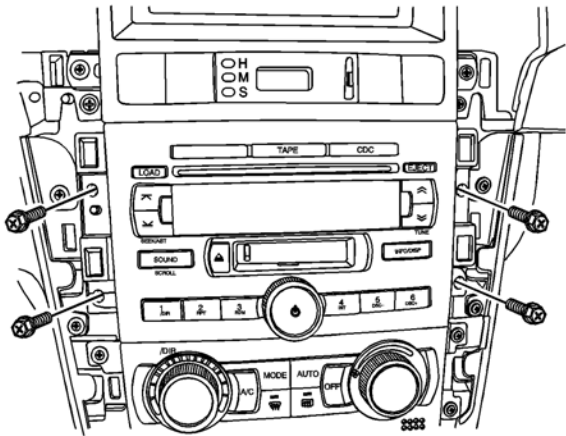

1. Connect the audio system electrical connectors.
2. Install the audio system with the screws.

**Tighten**  
Tighten the audio system screws to 4 N·m (35 lb in).