


Rear Storage Compartment Replacement


Removal Procedure

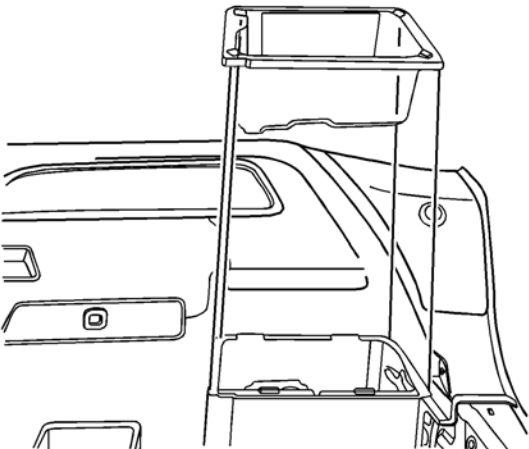

Remove the bolts and the rear compartment stow tray.

Installation Procedure

Notice: Refer to [Fastener Notice](#) in Cautions and Notices.

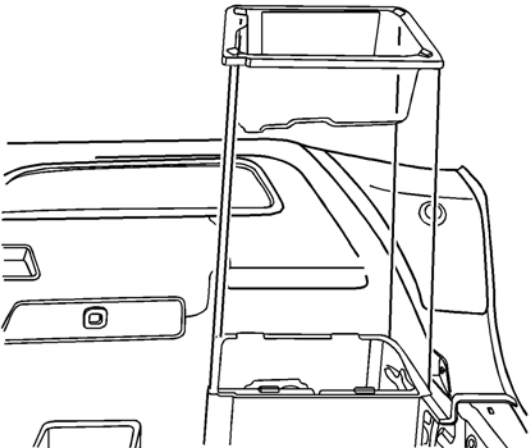

Install the rear compartment stow tray with the bolts.

Tighten
Tighten the rear compartment stow tray bolts to 8 N·m (11 lb ft).