


Instrument Panel Assembly Replacement (C105/Short Body)


Removal Procedure

Caution: Refer to [Battery Disconnect Caution](#) in the Preface section.


Important: Left - Hand Drive Shown, Right - Hand Drive Similar.

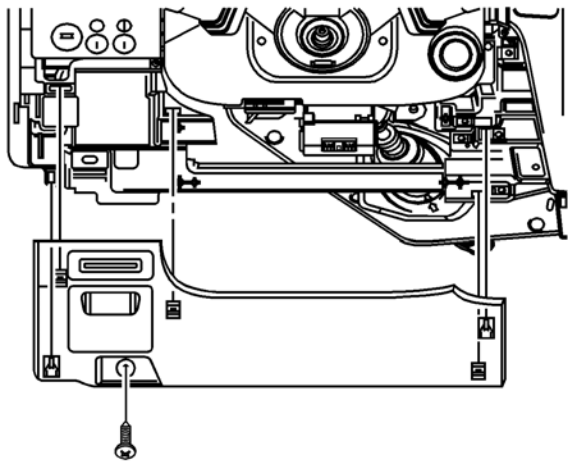

1. Disconnect the negative battery cable. Refer to [Battery Negative Cable Disconnection and Connection](#) .
2. Remove the instrument panel lower left trim. Refer to [Instrument Panel Lower Trim Panel Replacement - Left Side](#) .
3. Remove the front, rear floor console. Refer to [Console Replacement](#) .
4. Remove the radio . Refer to [Radio Replacement](#) .
5. Remove the headlamp leveling switch assembly. Refer to [Headlamp Leveling Switch Replacement](#) .
6. Remove the instrument cluster trim panel.
7. Remove the automatic temperature controls assembly. Refer to [Heater and Air Conditioning Control Replacement](#) .

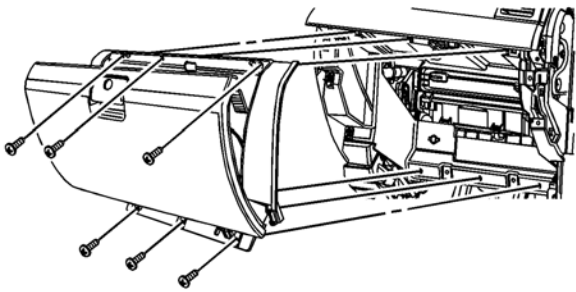

8. Remove the instrument cluster. Refer to [Instrument Cluster Replacement](#) .
9. Remove the kick panels.
10. Remove the storage compartment. Refer to [Instrument Panel Storage Compartment Replacement](#) .
11. Disconnect the instrument compartment electrical connectors.
12. Remove the knee bolster. Refer to [Knee Bolster Replacement](#) .

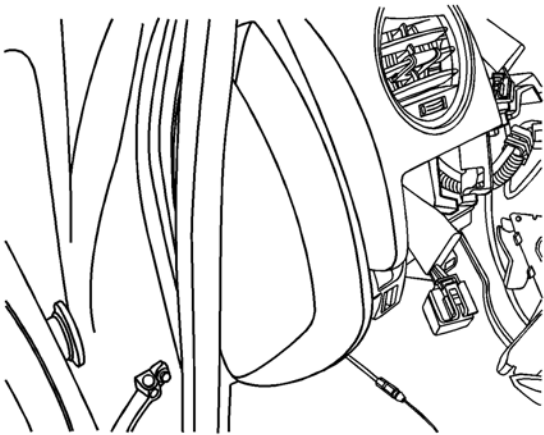

13. Remove the instrument panel side covers.