



# Muffler Replacement (3.2L)

## Removal Procedure

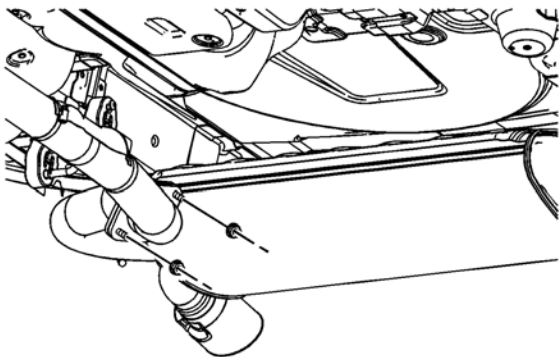


1. Remove the nuts and the gaskets from the rear muffler pipe flange-to-front muffler pipe flange.

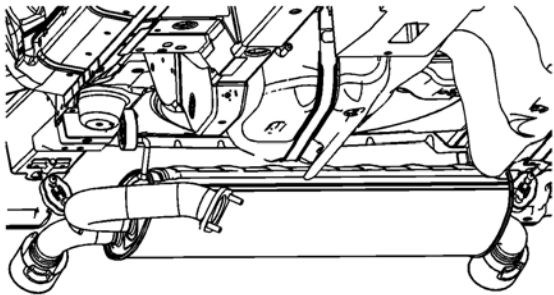

2. Detach the rear muffler assembly from the rubber hangers.
3. Remove the rear muffler.
4. Check the rear muffler and the pipe for holes, damage, open seams or other deterioration which could permit exhaust fumes to seep into the passenger compartment or the trunk.

## Installation Procedure

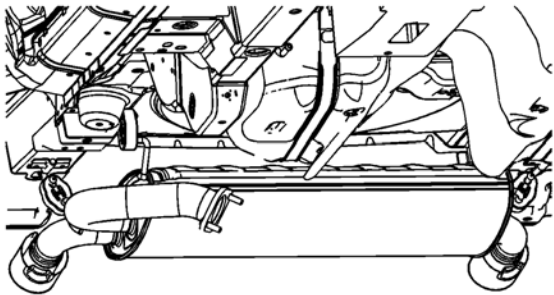

1. Secure the rear muffler assembly to the rubber hangers.

**Notice:** Refer to [Fastener Notice](#) in Cautions and Notices.