



Muffler Replacement (2.4L)

Removal Procedure

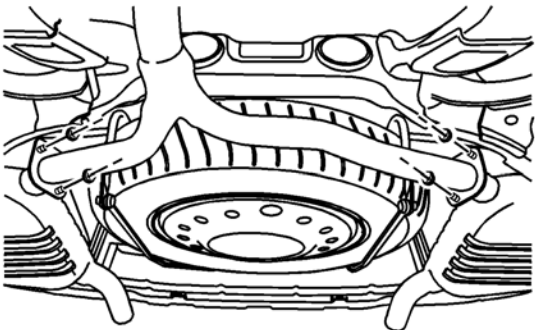


1. Remove the nuts and the gaskets from both resonator pipe flanges-to-front muffler pipe flanges.

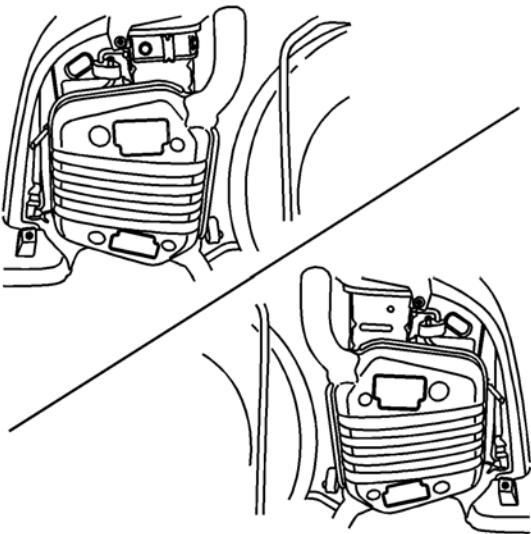

2. Detach both resonator assemblies from the rubber hangers.
3. Remove both resonators.
4. Check the rear resonator and the pipe for holes, damage, open seams and other deterioration which could permit exhaust fumes to seep into the passenger compartment or the trunk.

Installation Procedure

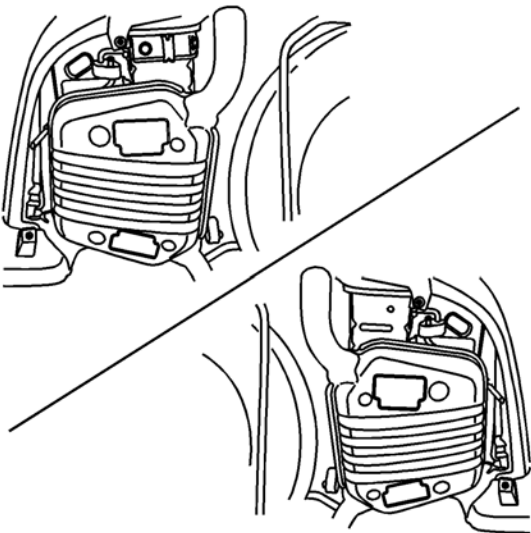

1. Secure both rear resonator assemblies to the rubber hangers.

Notice: Refer to [Fastener Notice](#) in Cautions and Notices.