



# Rear Side Door Outside Handle Replacement (C105/Short Body)

## Removal Procedure

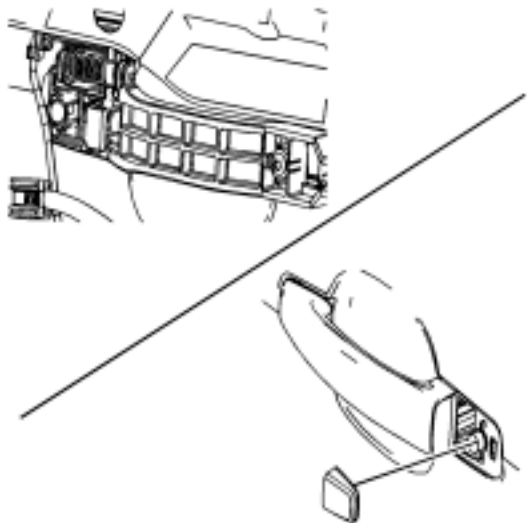


1. Remove the door water deflector. Refer to [Door Water Deflector Replacement](#) .
2. Remove the rear door lock. Refer to [Rear Door Lock Replacement](#) .
3. Remove the outside door handle cover bolt.
4. Remove the outside door handle support screw .
5. Remove the outside door handle cover.

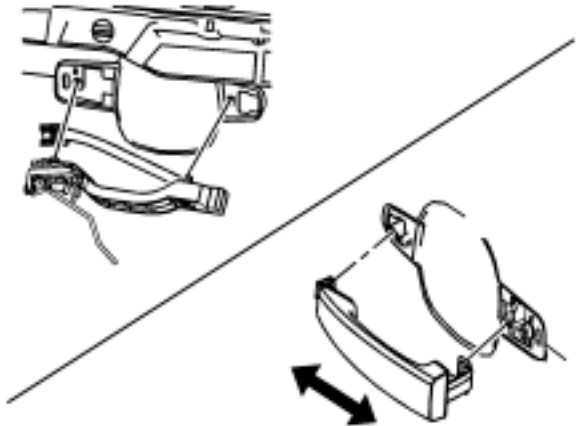

6. Slide the outside door handle knob backward and pull it outward.
7. Remove the outside door handle support.

## Installation Procedure

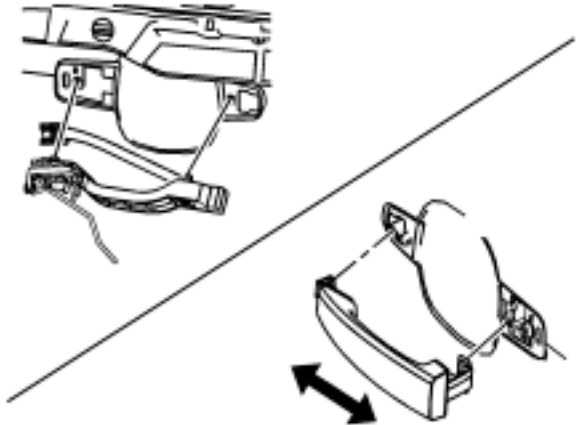

1. Install the outside door handle support.
2. Install the outside door handle knob.