




- 4. Pull back on front fascia (3) and remove the bolt (1) that secures the front fascia to fender bracket (2)
- 5. Pull back and remove the front fascia to fender bracket (2) from the fender.

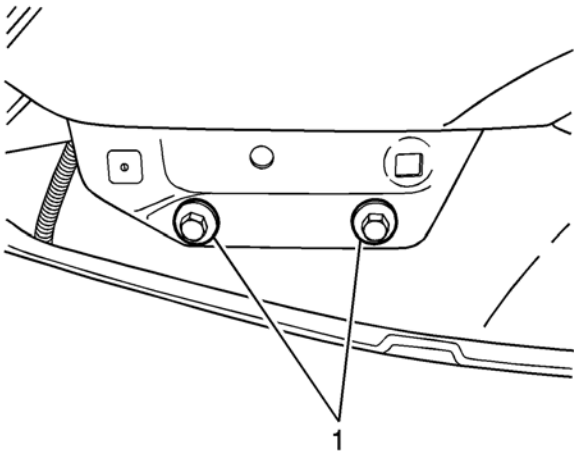

- 6. Remove the two bolts (1) from the front of the fender behind the front fascia.

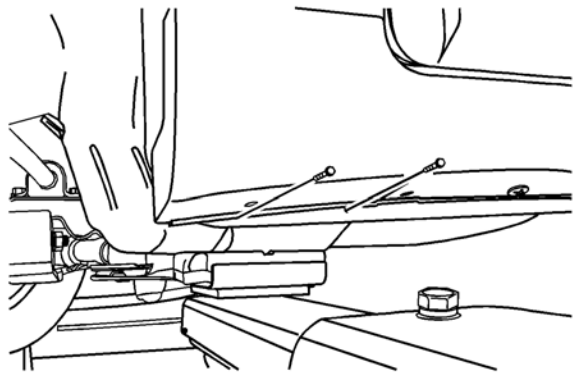

- 7. Remove the rocker panel molding. Refer to [Rocker Panel Molding Replacement](#) .
- 8. Remove the bolts at the base of the fender.

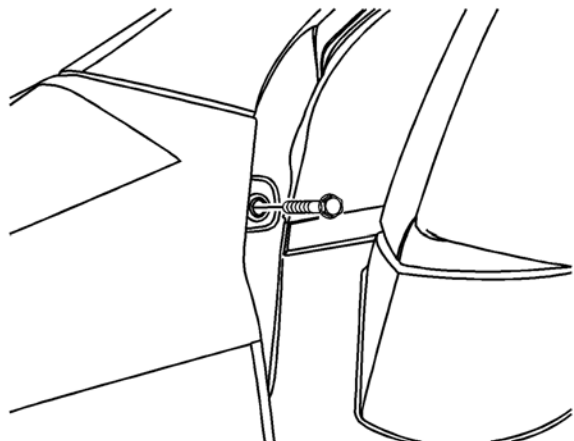

- 9. Open the front door and remove the bolt at the base of the A-pillar.