


# Fender Liner Replacement


## Removal Procedure

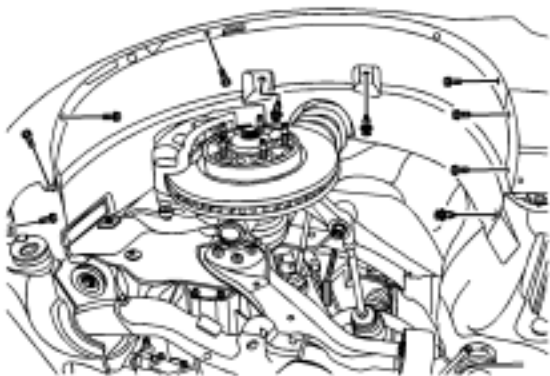

1. Raise and suitably support the vehicle. Refer to [Lifting and Jacking the Vehicle](#) .
2. Remove the front wheel. Refer to [Tire and Wheel Removal and Installation](#) .
3. Remove the front mud guard. Refer to [Guard Mud - Rear \(One or Both\) Replacement](#) .
4. Remove the engine protection shield. Refer to [Engine Protection Shield Replacement](#) .
5. Remove the screws and the front fender liner.

## Installation Procedure

**Notice:** Refer to [Fastener Notice](#) in Cautions and Notices.

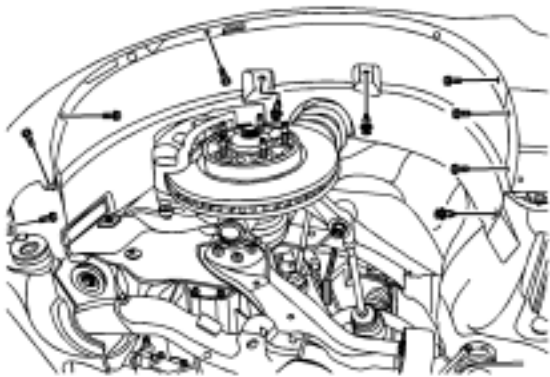

1. Install the screws and the front fender liner.

### Tighten

Tighten the front fender liner screws to 4 N·m (35 lb in).

2. Install the engine protection shield. Refer to [Engine Protection Shield Replacement](#) .
3. Install the front mud guard. Refer to [Guard Mud - Rear \(One or Both\) Replacement](#) .
4. Install the front wheel. Refer to [Tire and Wheel Removal and Installation](#) .
5. Lower the vehicle.