



Rear Side Door Window Replacement

Removal Procedure

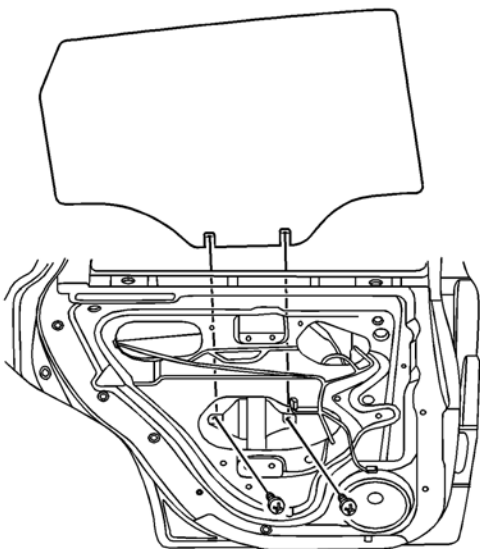

1. Remove the rear door trim. Refer to [Rear Door Trim Panel Replacement](#) .
2. Remove the rear side door window frame rear applique. Refer to [Rear Door Frame Applique Replacement](#) .
3. Remove the screws that secure the glass to the window regulator.
4. Remove the glass from the door.

Installation Procedure

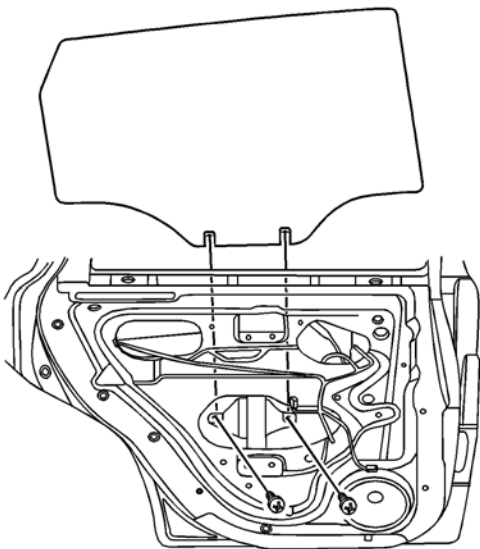

1. Install the glass in the door and position the glass within the window regulator.

Notice: Refer to [Fastener Notice](#) in Cautions and Notices.

2. Install the glass screws.

Tighten

Tighten the glass screws to 1.3 N·m (12 lb in).

3. Install the rear side door window frame rear applique. Refer to [Rear Door Frame Applique Replacement](#) .
4. Install the rear door trim. Refer to [Rear Door Trim Panel Replacement](#) .