



- 8. Remove the fender center molding from the fender by disengaging the four retainer clips.
- 9. Remove the fender bolts.

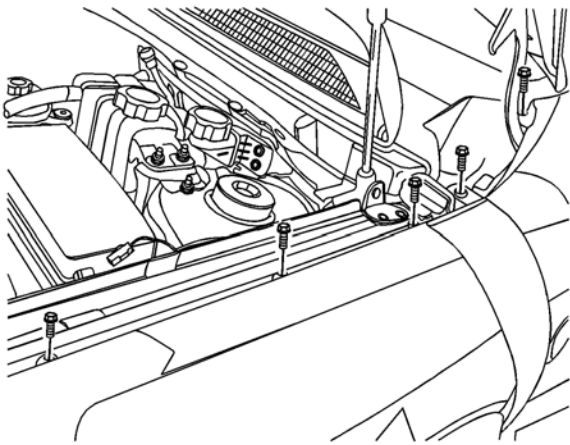

- 10. Remove the upper fender bolts and the fender.

Installation Procedure

Notice: Refer to [Fastener Notice](#) in the Preface section.

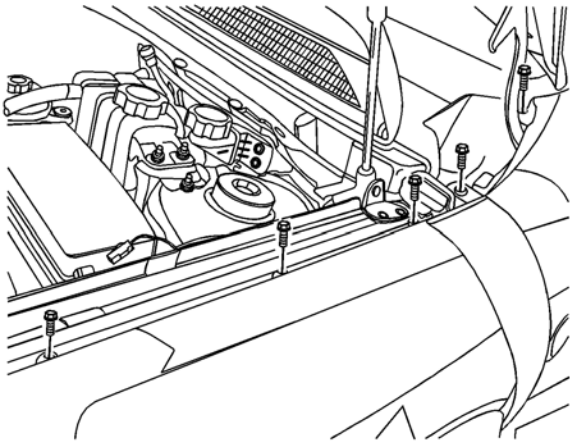

- 1. Install the fender with the upper fender bolts.

Tighten

Tighten the upper fender bolts to 10 N·m (89 lb in).