


# Rear Wiper Park Replacement


## Removal Procedure

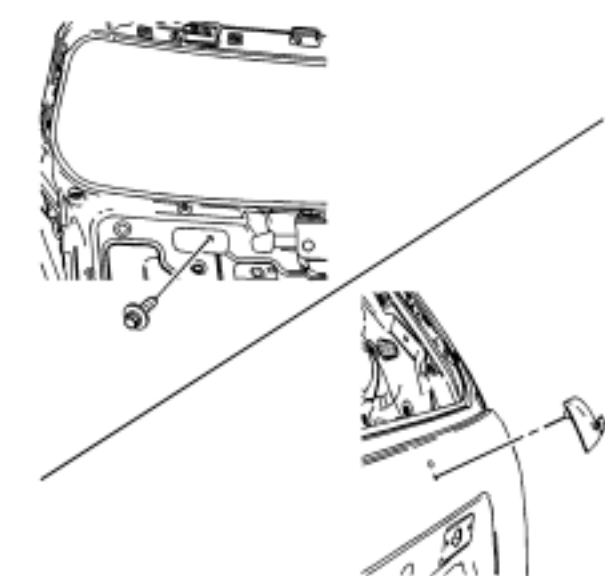

1. Remove the liftgate lower applique. Refer to [Liftgate Applique Replacement](#) .
2. Remove the bolt and rear wiper arm park.

## Installation Procedure

**Notice:** Refer to [Fastener Notice](#) in Cautions and Notices.

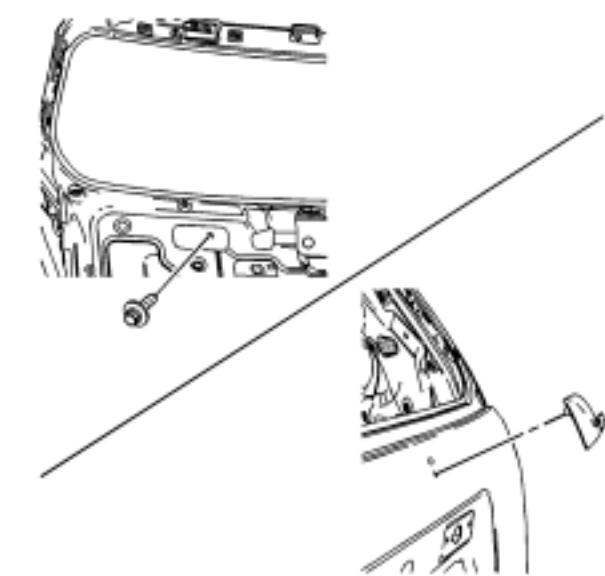

1. Install the rear wiper arm park with the bolt.

**Tighten**  
Tighten the rear wiper arm park bolt to 3 N·m (27 lb in).

2. Install the liftgate lower applique. Refer to [Liftgate Applique Replacement](#) .