


- 5. Install the headlamps (1). Refer to [Headlamp Replacement](#) .
- 6. Install the radiator cover (2).


**Notice:** Refer to [Fastener Notice](#) in the Preface section.

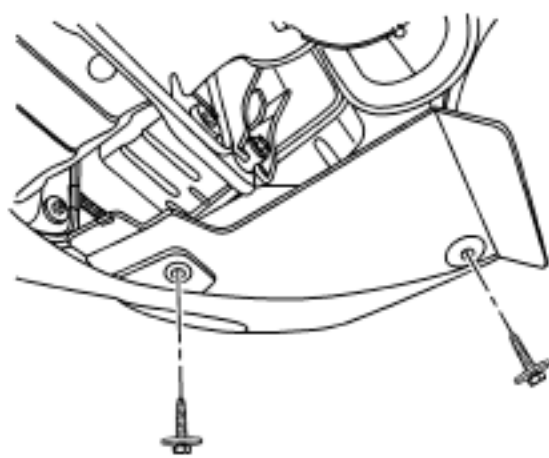

- 7. Install the front bolts of the left and right front splash shields.

**Tighten**  
Tighten the front splash shield bolts to 10 N·m (7 lb ft).

- 8. Install the engine shield. Refer to [Engine Shield Replacement](#) .

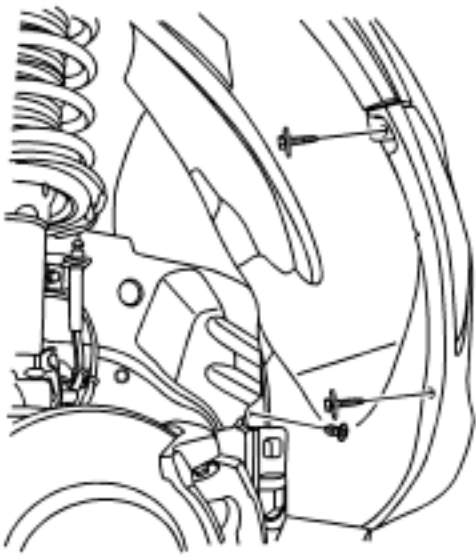

- 9. Install the bolts and retainers on the left and right front wheel well splash shields.

**Tighten**  
Tighten the splash shield bolts to 4 N·m (35 lb in).

- 10. Connect the negative battery cable. Refer to [Battery Negative Cable Disconnection and Connection](#) .