

1. Connect the electrical connectors.

**Notice:** Refer to [Fastener Notice](#) in Cautions and Notices.

2. Install the front console retainer with screws.

**Tighten**


Tighten the front console retainer screws to 8 N·m (71 lb in).

3. Install the floor console with the bolts.


**Tighten**

Tighten the front console screw to 8 N·m (71 lb in).

4. Install the instrument panel storage compartment. Refer to [Instrument Panel Storage Compartment Replacement](#) .

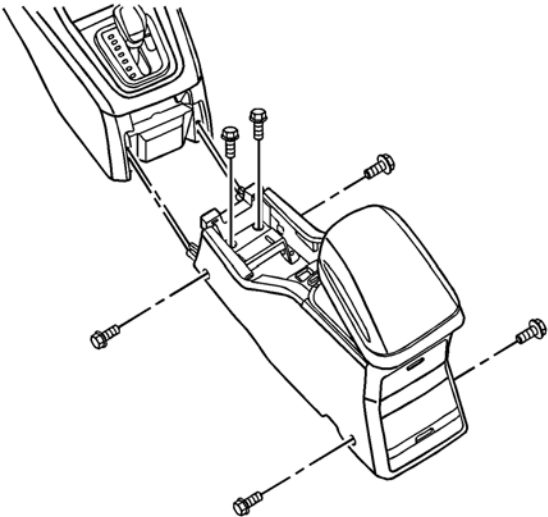

5. Connect the electrical connectors.
6. Install the cupholder and console cover.

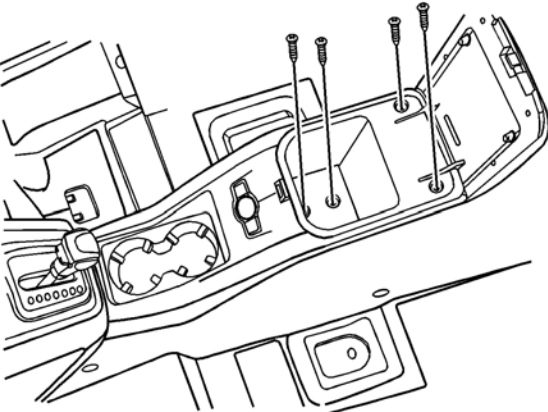

7. Install the instrument compartment lower . Refer to [Instrument Panel Lower Compartment Replacement](#) .
8. Install the front seats. Refer to [Bucket Seat Replacement](#) .
9. Install the radio. Refer to [Radio Replacement](#) .
10. Connect the negative battery cable. Refer to [Battery Negative Cable Disconnection and Connection](#) .