


# Grille Replacement (C105/Short Body)


## Removal Procedure

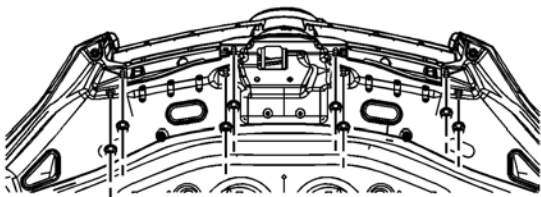

1. Open the hood.
2. Remove the nuts and the radiator grille.

## Installation Procedure

**Notice:** Refer to [Fastener Notice](#) in the Preface section.

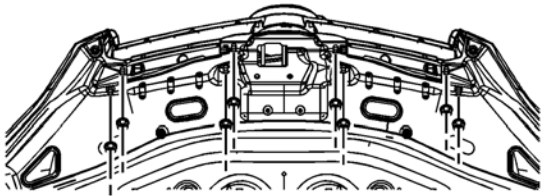

1. Install the radiator grille with the nuts.

**Tighten**  
Tighten the radiator grille nuts to 4.5 N·m (40 lb in).

2. Close the hood.