


# Rear Bumper Impact Bar Replacement


## Removal Procedure

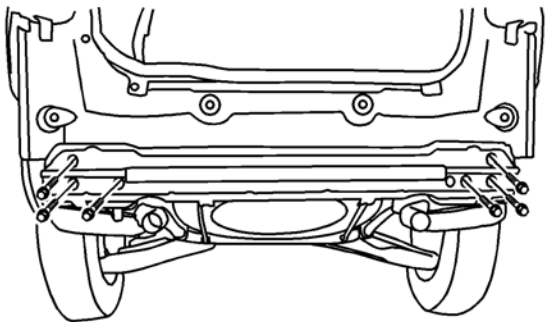

1. Remove the rear bumper fascia. Refer to [Rear Bumper Fascia Replacement](#) .
2. Remove the bolts and the rear impact bar.

## Installation Procedure

**Notice:** Refer to [Fastener Notice](#) in Cautions and Notices.

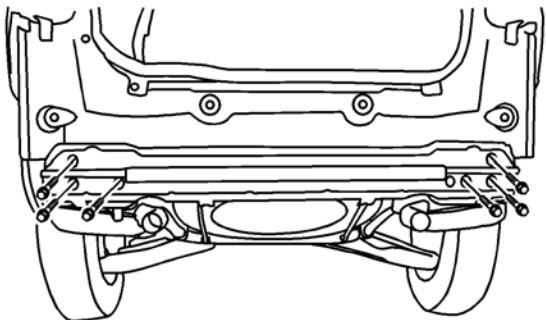

1. Install the rear impact bar with the bolts.

**Tighten**  
Tighten the rear impact bar bolts to 22 N·m (16 lb ft).

2. Install the rear bumper fascia. Refer to [Rear Bumper Fascia Replacement](#) .