



8. Remove the front fascia retainers.

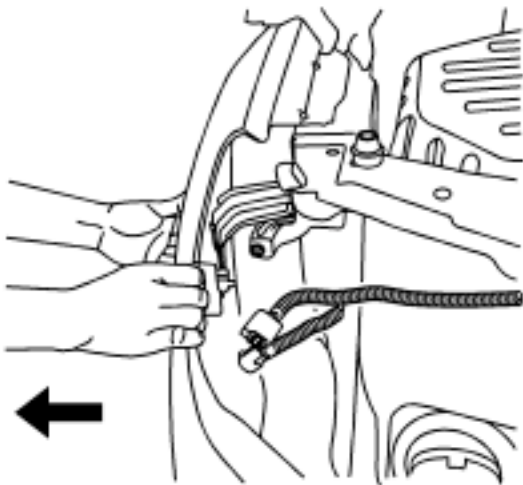


9. Remove the front fascia from the front fender by pulling the side of the fascia outward.
10. Remove the front fascia from the vehicle.

Installation Procedure

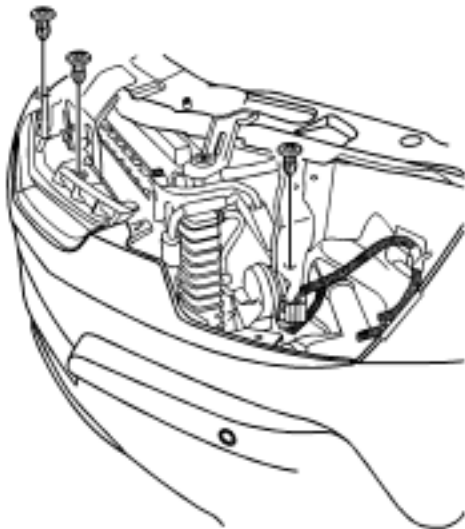

1. Install the front fascia to the vehicle.
2. Install the retainers on the front fascia to prevent fascia falling down to the floor.

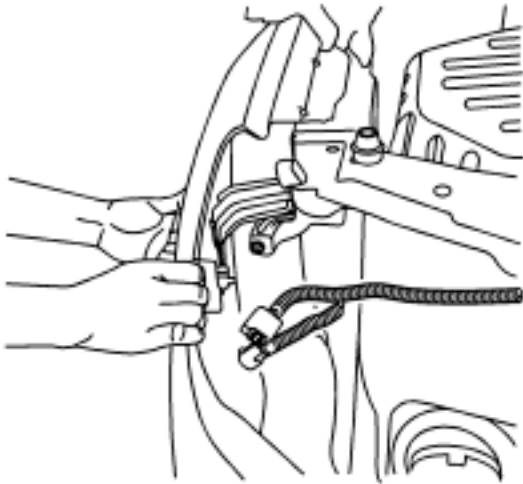

3. Install the side of the front fascia on the front fender.
4. Connect the connector of the front object sensor wiring harness, if equipped.