



Front Side Door Outside Handle Replacement (C100/Long Body)

Removal Procedure

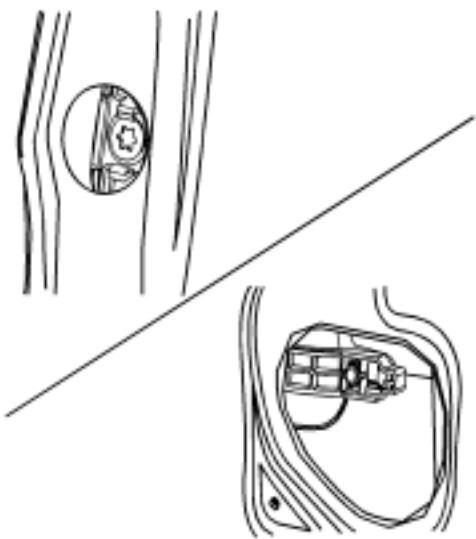


1. Remove the door water deflector. Refer to [Door Water Deflector Replacement](#) .
2. Remove the outside door handle screw cap.
3. Remove the outside door handle screw through the door shut face.
4. Remove the outside door handle by sliding rearward and pulling away from the door.

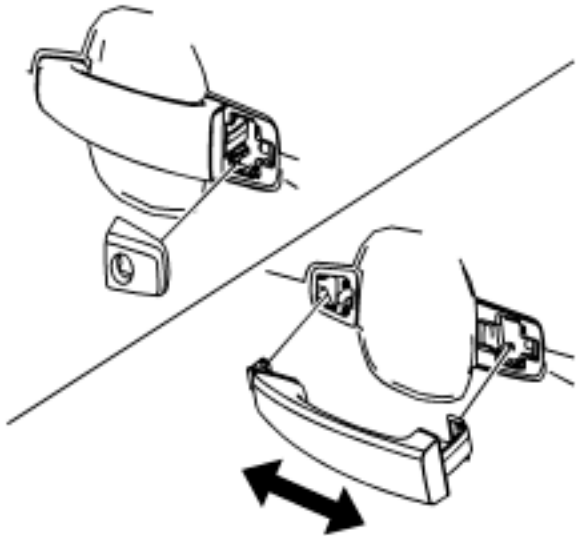

5. Remove the gasket, if necessary.

Installation Procedure

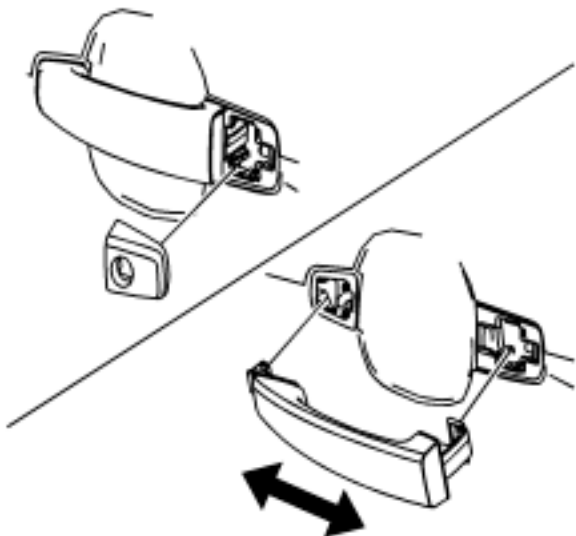

1. Install the gasket, if necessary.