


Tighten the door hinge-to-body bolts to 27.5 N·m (20 lb ft).

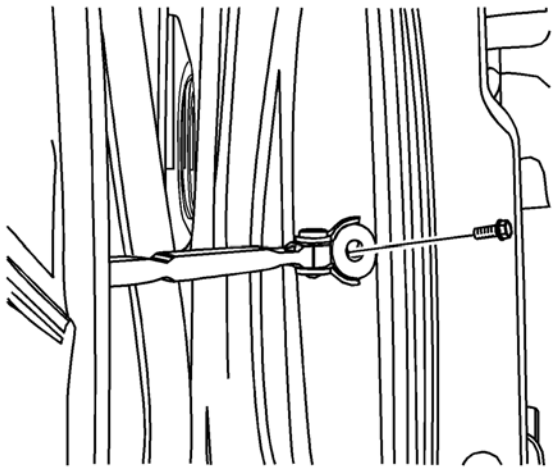

4. Install the door hold-open link to the body with the bolts.

**Tighten**

Tighten the door hold-open link-to-body bolt to 20 N·m (15 lb ft).

5. Connect the negative battery cable. Refer to [Battery Negative Cable Disconnection and Connection](#) .
6. Perform the waterleak test. Refer to [Water Hose Test](#) .
7. Check for windnoise. Refer to [Exterior Windnoise](#) .