



Rear Side Door Lower Molding Replacement

Removal Procedure

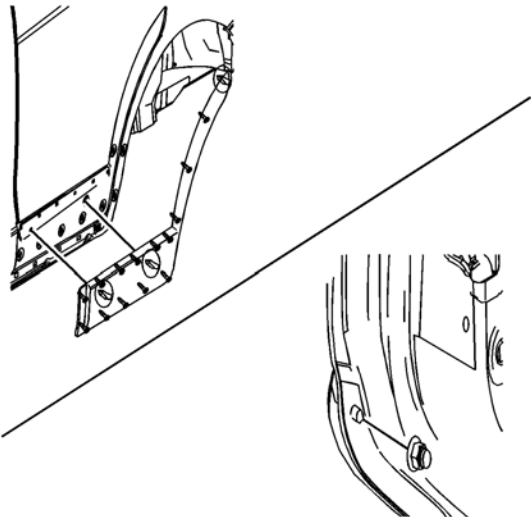

Remove the nut and the rear side door lower molding.

Installation Procedure

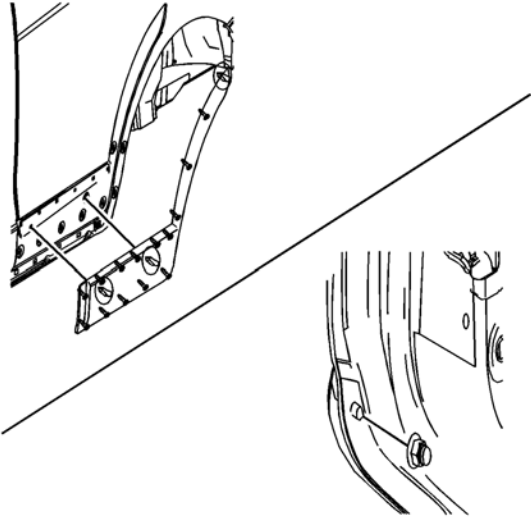

Notice: Refer to [Fastener Notice](#) in Cautions and Notices.

Install the rear side door lower molding with the nut.

Tighten

Tighten the rear side door lower molding nut to 4.5 N·m (40 lb in).