


# Front Fender Wheel Opening Molding Replacement


## Removal Procedure

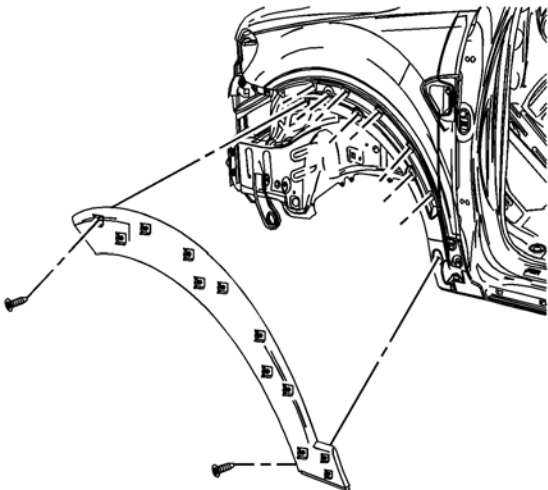

1. Remove the front mud guards.
2. Remove the screws and front fender wheel opening molding.

## Installation Procedure

**Notice:** Refer to [Fastener Notice](#) in Cautions and Notices.

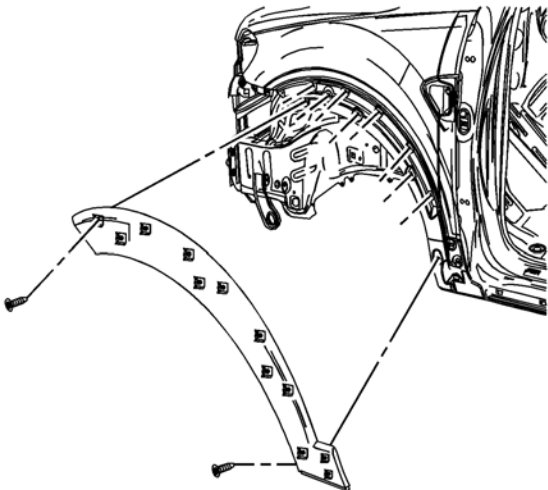

1. Install the front fender wheel opening molding with the screws.

### Tighten

Tighten the front fender wheel opening molding screws to 4 N·m (35 lb in).

2. Install the front mud guard.