



1. Install the headlamp bulbs.
2. Connect the headlamp bulb electrical connectors.
3. Install the cap that conceals the headlamp bulbs.

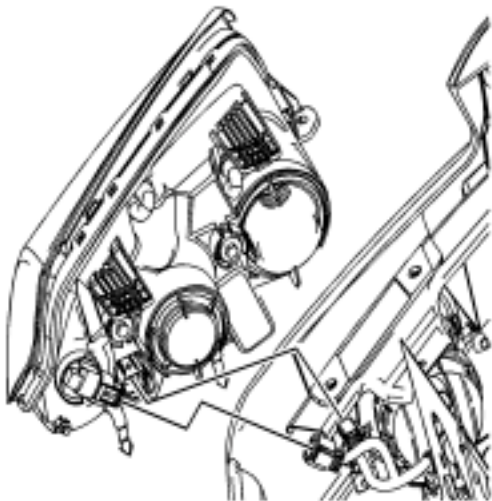

4. Connect the headlamp assembly electrical connectors.

Notice: Refer to [Fastener Notice](#) in Cautions and Notices.

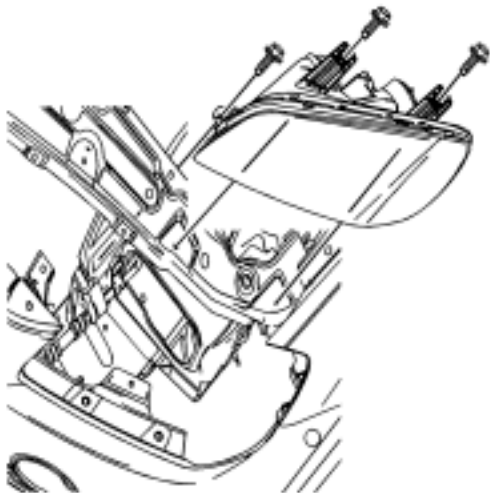

5. Install the headlamp assembly with the bolts.

Tighten
Tighten the headlamp assembly bolts to 7 N·m (62 lb in).

6. Install the radiator grille upper cover.
7. Connect the negative battery cable. Refer to [Battery Negative Cable Disconnection and Connection](#) .