



Rear Mud Flap Guard Replacement

Removal Procedure

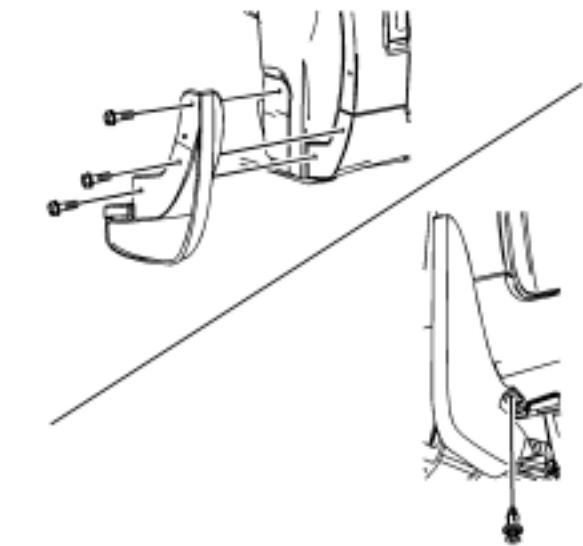

Remove the screw and the bolts and the mud guard.

Installation Procedure

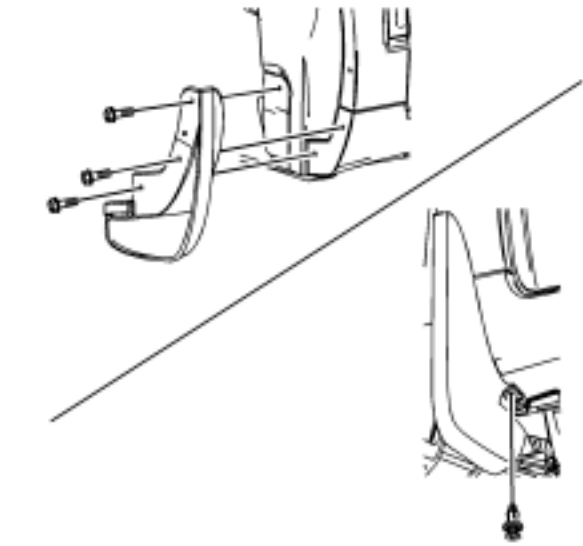

Notice: Refer to [Fastener Notice](#) in Cautions and Notices.

Install the mud guard with the bolts and the screw.

Tighten

Tighten the mud guard bolts to 2 N·m (18 lb in).