



Turn Signal Multifunction Switch Replacement (C100/Long Body)

Removal Procedure

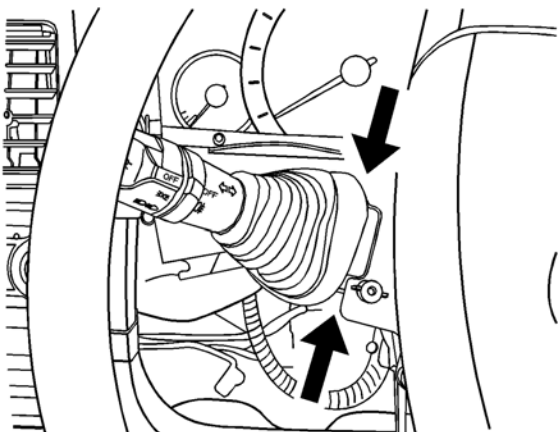

1. Disconnect the negative battery cable. Refer to [Battery Negative Cable Disconnection and Connection](#) .
2. Remove the steering column covers. Refer to [Steering Column Trim Covers Replacement](#) .
3. Remove the turn signal switch by pushing in on the tabs on the top and the bottom of the switch housing.
4. Disconnect the electrical connections from the turn signal switch.

Installation Procedure

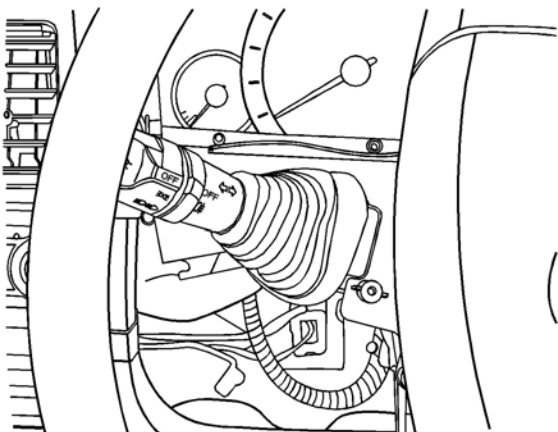

1. Connect the electrical connections to the turn signal switch.
2. Install the turn signal switch by snapping the switch into the switch housing.
3. Install the steering column cover. Refer to [Steering Column Trim Covers Replacement](#) .
4. Connect the negative battery cable. Refer to [Battery Negative Cable Disconnection and Connection](#) .