


Front Side Door Trim Panel Replacement (C 105/Short Body)


Tools Required

[KM 475-A](#) Trim Remover

Removal Procedure

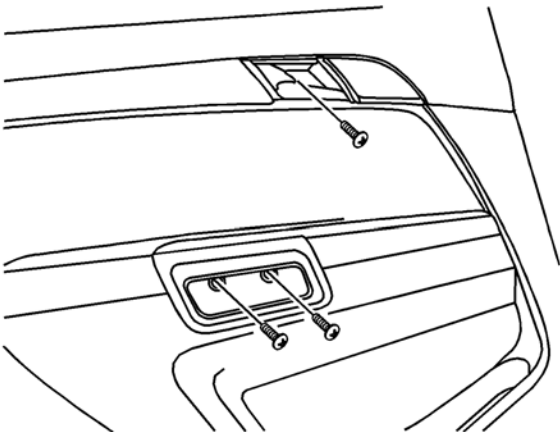


1. Lower the front window.
2. Remove the front door trim panel screws.

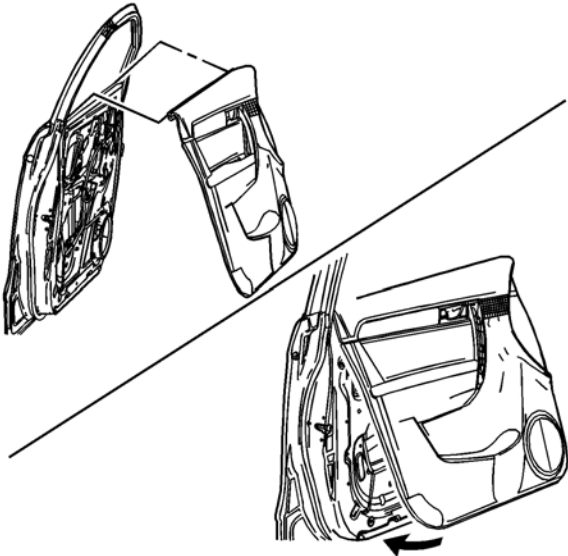

3. Pry off the front door trim panel using the trim remover [KM 475-A](#) .
4. Remove the door inner handle cable.
5. Disconnect the electrical connectors.

Installation Procedure

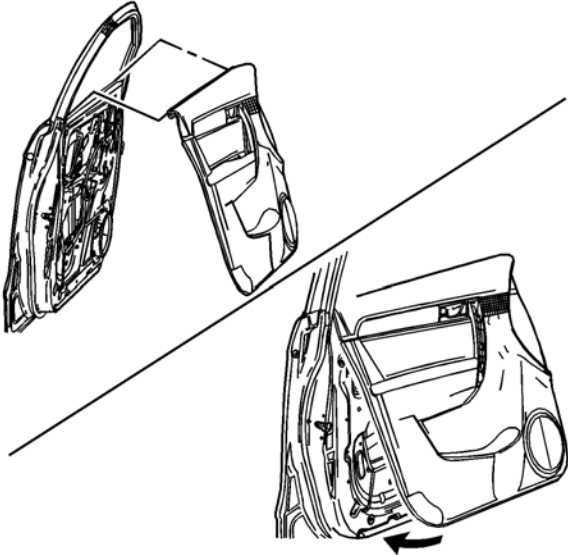

1. Connect the electrical connectors.
2. Install the door inner handle cable.
3. Install the front door trim panel.