



Rear Number 2 Folding Seat Replacement

Removal Procedure

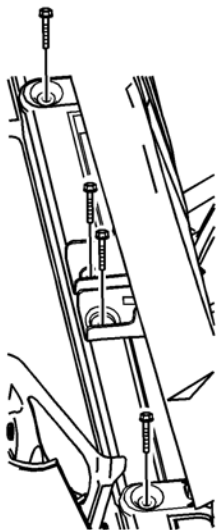

1. Remove the bolts securing the rear portion of the 3rd rear seat to the floor.
2. Remove the 3rd rear seat.

Installation Procedure

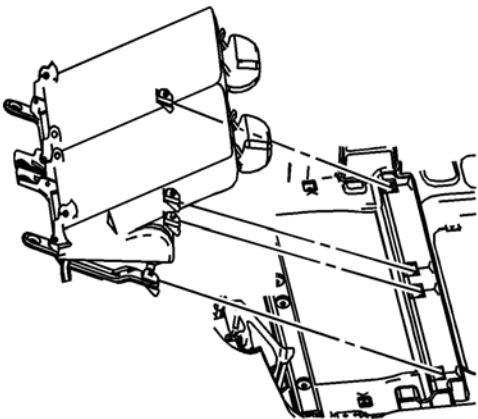

1. Install the 3rd rear seat.

Notice: Refer to [Fastener Notice](#) in Cautions and Notices.

2. Install the bolts into the rear portion of the 3rd rear seat.

Tighten

Tighten the rear seat-to-floor bolts to 45 N·m (33 lb ft).