



- 6. Remove the tail lamps. Refer to [Tail Lamp Replacement](#) .
- 7. Remove the upper fascia screws and retainers.

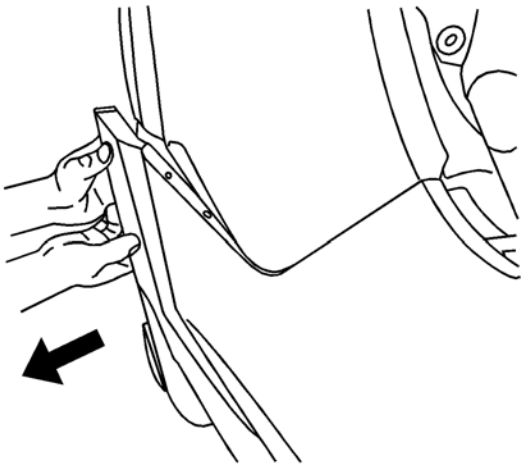

- 8. Remove the rear bumper fascia from the rear quarter panel by pulling the side of the fascia outward.
- 9. Remove the rear bumper fascia from the vehicle.

Installation Procedure

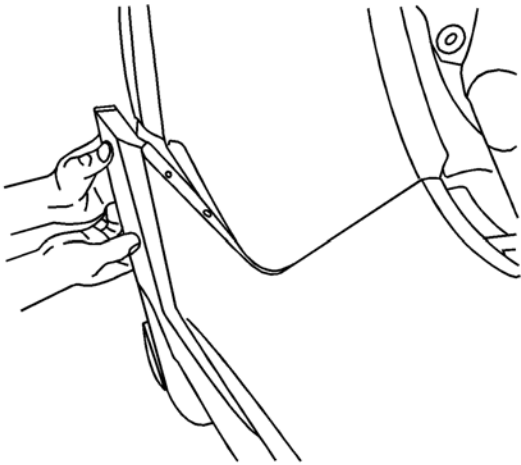

- 1. Install the rear bumper fascia to the vehicle.
- 2. Install the side of the rear bumper fascia to the rear quarter panel.

**Notice:** Refer to [Fastener Notice](#) in the Preface section.