


# Body Side Window Rear Garnish Molding Replacement (C 100/Long Body)


## Removal Procedure

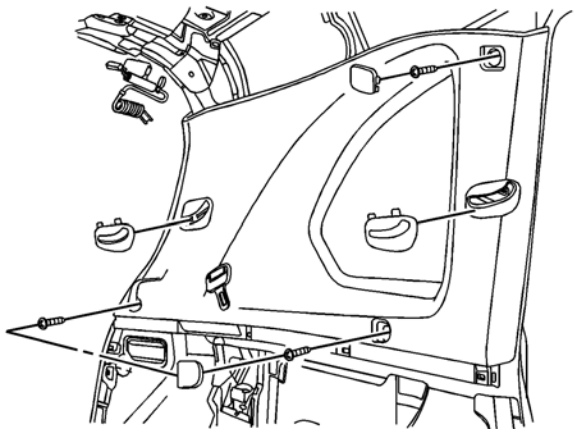

1. Remove the rear seat lower belts. Refer to [Seat Belt Retractor Replacement - No. 1 Rear](#) or [Seat Belt Retractor Replacement - No. 2 Rear](#) .
2. Remove the screws and the quarter window garnish molding.

## Installation Procedure

**Notice:** Refer to [Fastener Notice](#) in the Preface section.

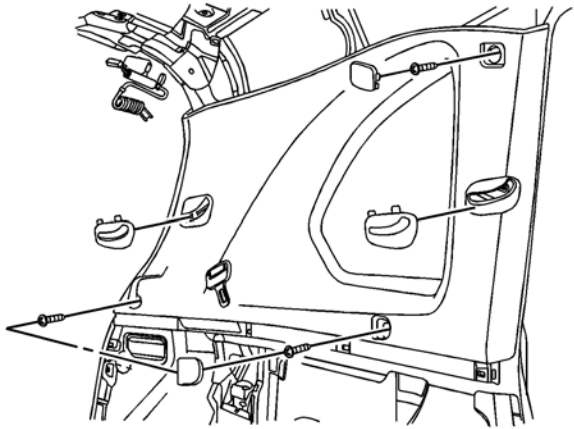

1. Install the quarter window garnish molding with the screws.

**Tighten**  
Tighten the quarter window garnish molding screws to 2 N·m (18 lb in).

2. Install the rear seat lower belts. Refer to [Seat Belt Retractor Replacement - No. 1 Rear](#) or [Seat Belt Retractor Replacement - No. 2 Rear](#) .