


Rear Quarter Lower Trim Panel Replacement (C 100/Long Body)


Removal Procedure

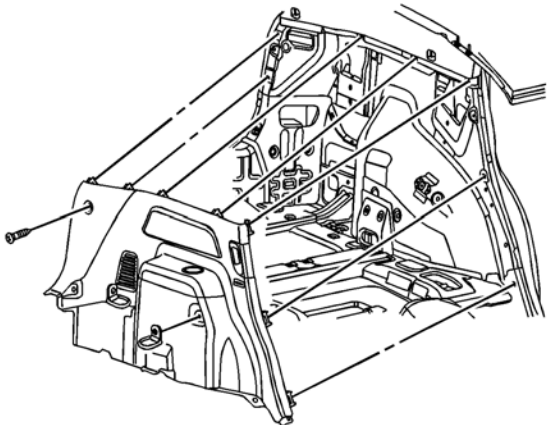

1. Remove the rear seat lower bolts. Refer to [Seat Belt Retractor Replacement - No. 1 Rear](#) and [Seat Belt Retractor Replacement - No. 2 Rear](#).
2. Remove the rear compartment stow tray. Refer to [Rear Storage Compartment Replacement](#).
3. Remove the screws and the rear quarter lower trim panel.

Installation Procedure

Notice: Refer to [Fastener Notice](#) in the Preface section.

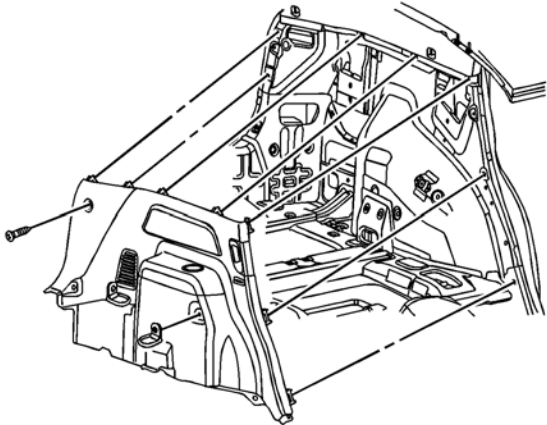

1. Install the rear quarter lower trim panel with the screws.

Tighten
Tighten the rear trim panel screws to 2 N·m (18 lb in).

2. Install the rear compartment stow tray. Refer to [Rear Storage Compartment Replacement](#).
3. Install the rear seat lower bolts. Refer to [Seat Belt Retractor Replacement - No. 1 Rear](#) and [Seat Belt Retractor Replacement - No. 2 Rear](#).