



# Front Side Door Outside Handle Replacement (C105/Short Body)

## Removal Procedure

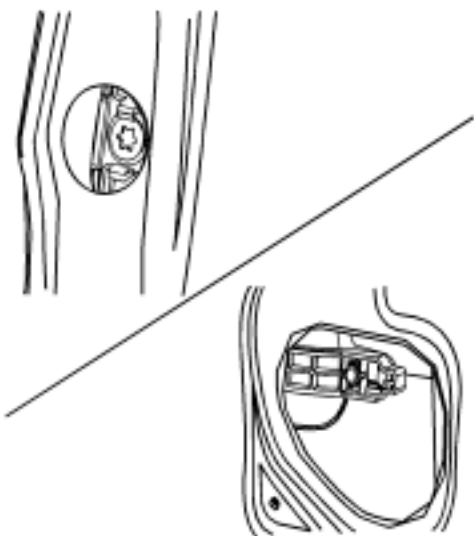


1. Remove the door water deflector. Refer to [Door Water Deflector Replacement](#) .
2. Disconnect the outside door handle and lock rods.
3. Remove the bolt that secures the outside door handle cover.
4. Remove the screw that secures the outside door handle support.

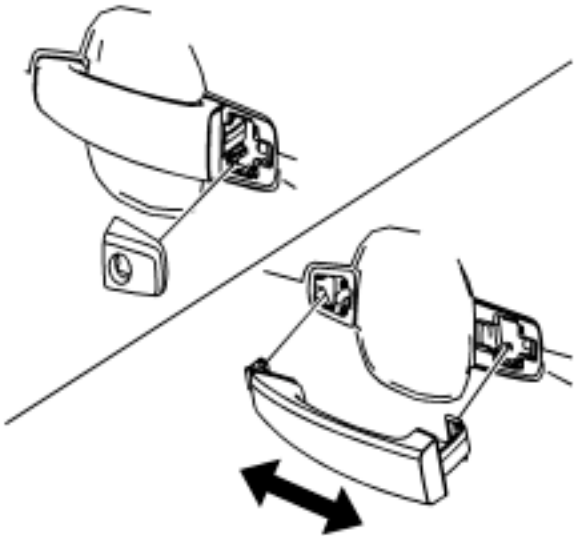

5. Remove the outside door handle cover.
6. Slide the outside door handle knob backward and pull it outward.
7. Remove the outside door handle support.

## Installation Procedure

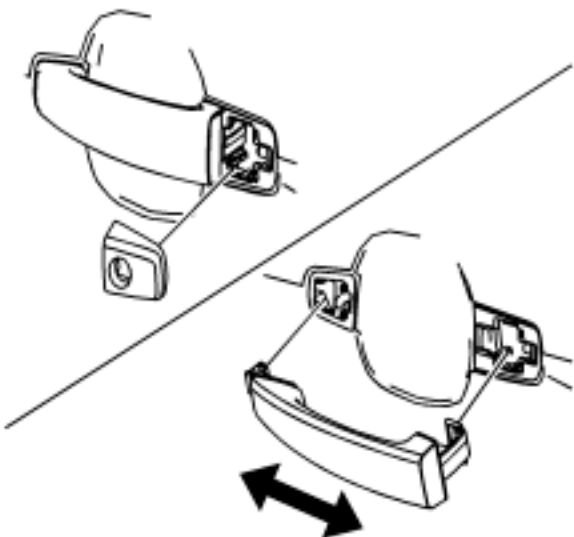

1. Install the outside door handle support.
2. Install the outside door handle knob.
3. Install the outside door handle cover.

**Notice:** Refer to [Fastener Notice](#) in the Preface section.