



# Liftgate Upper Applique Replacement (C100/Long Body)

## Removal Procedure

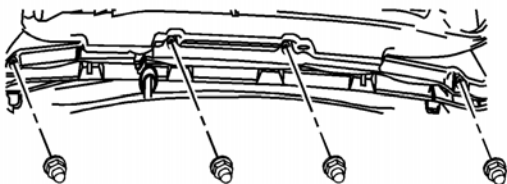


1. Open the liftgate.
2. Remove the nuts from the liftgate upper applique.

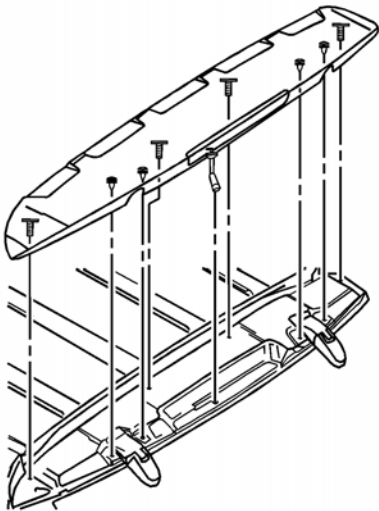

3. Close the liftgate.
4. Remove the liftgate upper applique from the vehicle.

## Installation Procedure

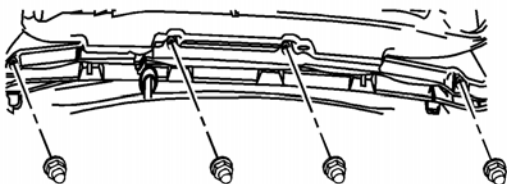

1. Position the upper applique to the liftgate.
2. Install the liftgate upper applique nuts.

**Notice:** Refer to [Fastener Notice](#) in the Preface section.

**Tighten**  
Tighten the liftgate upper applique nuts to 6 N·m (53 lb in).