


1. Install the seat belt retractor (2) with the bolt (1).

Tighten
Tighten the seat belt retractor bolt to 38 N·m (28 lb ft).


Notice: Refer to [Fastener Notice](#) in Cautions and Notices.

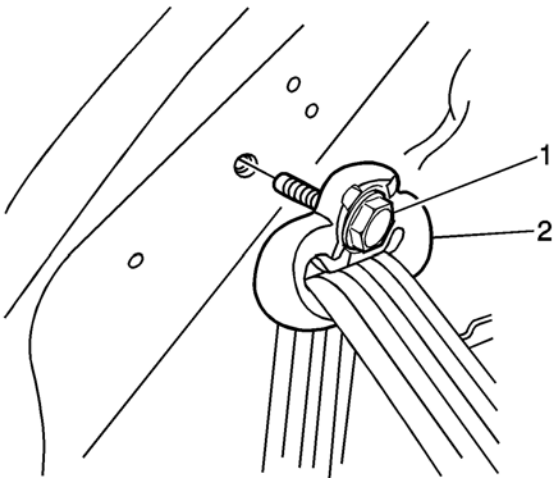

2. Install the seat belt anchor (2) with the bolt (1).

Tighten
Tighten the seat belt anchor bolt to 38 N·m (28 lb ft).

3. Install the wheelhouse trim panel.
4. Install the quarter window trim panel.

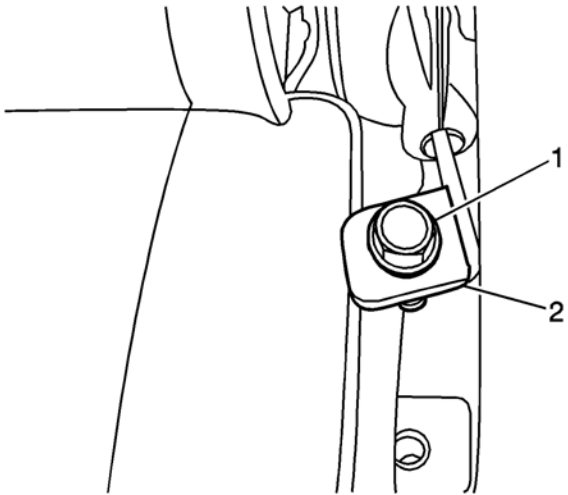

5. Install the seat belt anchor with the bolt (1) to the floor.

Tighten
Tighten the seat belt anchor bolt to 38 N·m (28 lb ft).