



Front Bumper Fascia Replacement (C 100/Long Body)

Removal Procedure


Caution: Refer to [Battery Disconnect Caution](#) in the Preface section.

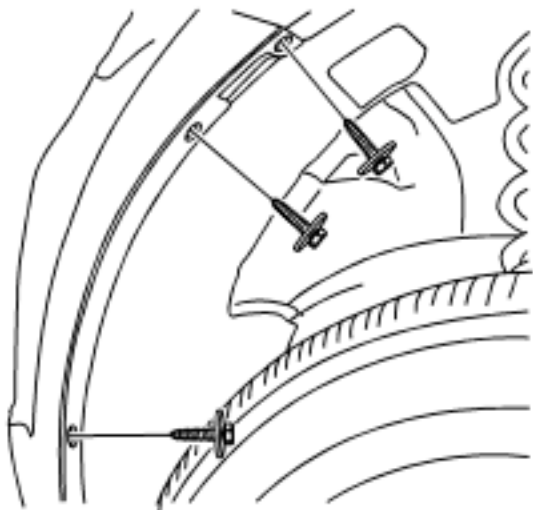

1. Disconnect the negative battery cable. Refer to [Battery Negative Cable Disconnection and Connection](#) .
2. Remove the bolts from the front wheel well splash shields.

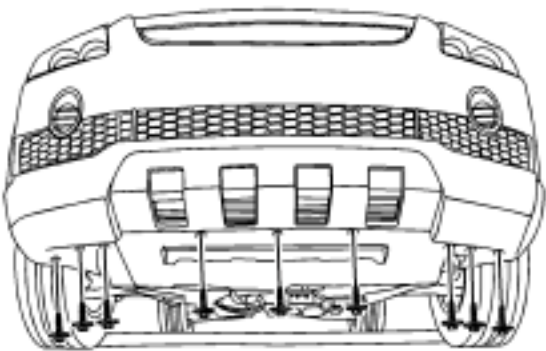

3. Remove the headlamps. Refer to [Headlamp Replacement](#) .
4. Disconnect the fog lamp electrical connector.

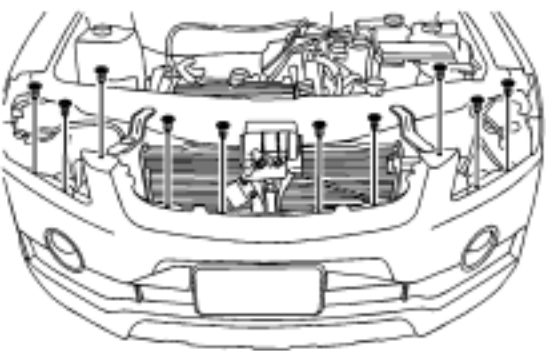

5. Remove the grille. Refer to [Grille Replacement](#) .
6. Remove the upper fascia retainers.