


Front Door Frame Applique Replacement (C105/Short Body)


Removal Procedure

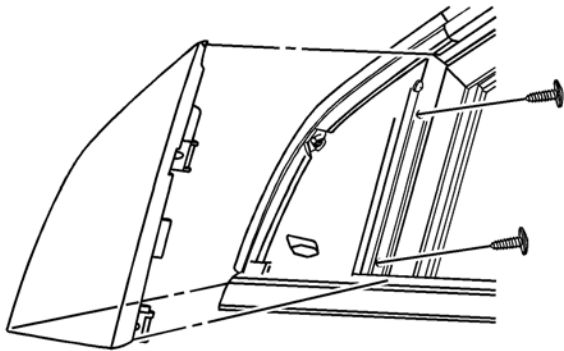

1. Remove the front door applique screws.
2. Remove the front door frame applique.

Installation Procedure

Notice: Refer to [Fastener Notice](#) in the Preface section.

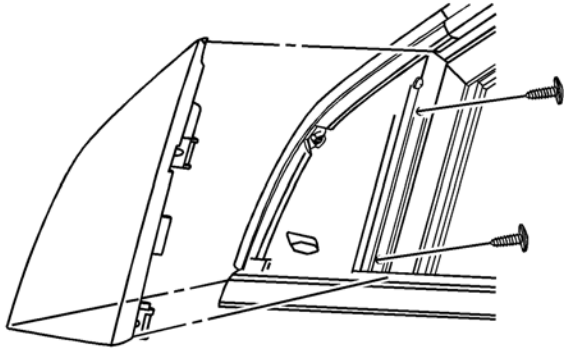

1. Install the front door frame applique.
2. Install the screws to the front door frame applique.

Tighten

Tighten the front door applique screws to 1.3 N·m (12 lb in).