


1. Position the instrument panel in the vehicle.
2. Connect the instrument panel electrical connectors.

**Notice:** Refer to [Fastener Notice](#) in the Preface section.

3. Lift up the instrument panel and install the instrument panel to T-bar nuts.

**Tighten**

Tighten the instrument panel to T-bar nuts to 10 N·m (89 lb in).

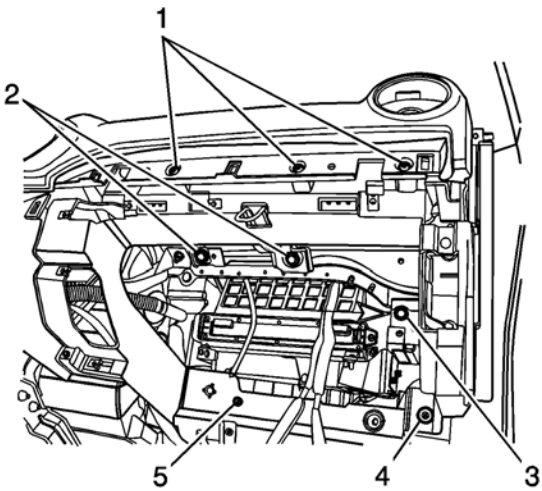

4. Install the nut (3) securing the instrument panel backside.

**Tighten**

Tighten the instrument panel backside nut to 10 N·m (89 lb in).

5. Install the right lower instrument panel retaining bolt (4).

**Tighten**

Tighten the right lower instrument panel retaining bolt to 10 N·m (89 lb in).

6. Install the screw (5) near the blower motor and the screws (1) near the instrument panel compartment.

**Tighten**

Tighten the screws near the blower motor and the instrument panel compartment to 2 N·m (18 lb in).

7. Install the air bag retaining bolts (2).

**Tighten**

Tighten the air bag retaining bolts to 10 N·m (89 lb in).