



# Liftgate Upper Applique Replacement (C105/Short Body)

## Removal Procedure

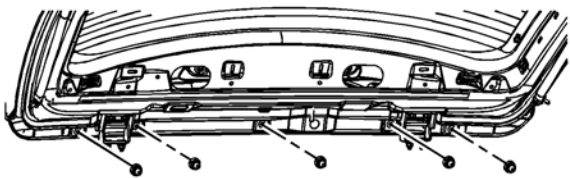

1. Open the liftgate.
2. Remove the nuts from the liftgate upper applique.
3. Close the liftgate.
4. Remove the liftgate upper applique from the vehicle.

## Installation Procedure

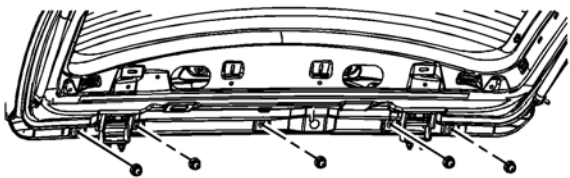

1. Position the upper applique to the liftgate.
2. Install the liftgate upper applique nuts.

### Tighten

Tighten the liftgate upper applique nuts to 6 N·m (53 lb in).