



6. Remove the tail lamps. Refer to [Tail Lamp Replacement](#) .
7. Remove the upper fascia screws and retainers.

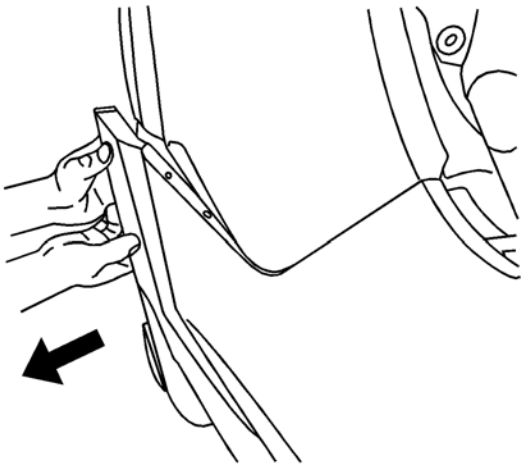

8. Remove the rear bumper fascia from the rear quarter panel by pulling the side of the fascia outward.
9. Remove the rear bumper fascia from the vehicle.

Installation Procedure

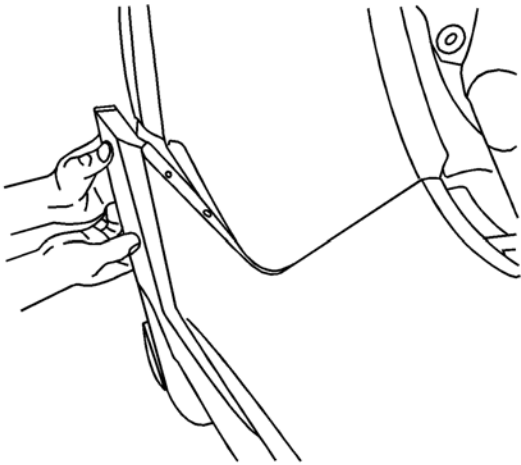

1. Install the rear bumper fascia to the vehicle.
2. Install the side of the rear bumper fascia to the rear quarter panel.

**Notice:** Refer to [Fastener Notice](#) in the Preface section.