



# Rear Bumper Fascia Replacement (C 100/Long Body)


## Removal Procedure

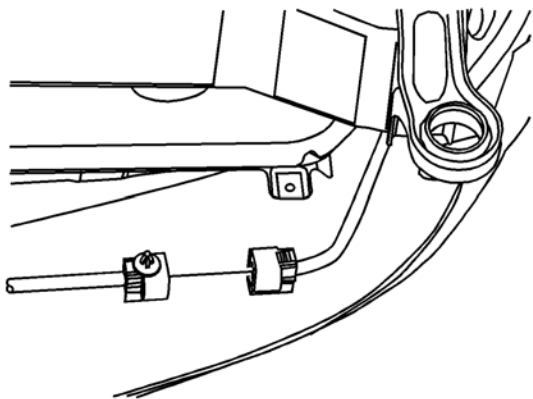

1. Disconnect the negative battery cable. Refer to [Battery Negative Cable Disconnection and Connection](#) .
2. Disconnect the connector of the rear object sensor, if equipped.

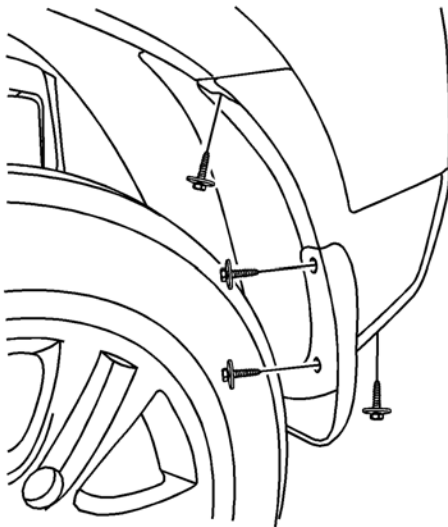

3. Remove the bolts on the rear wheelhouse liner.

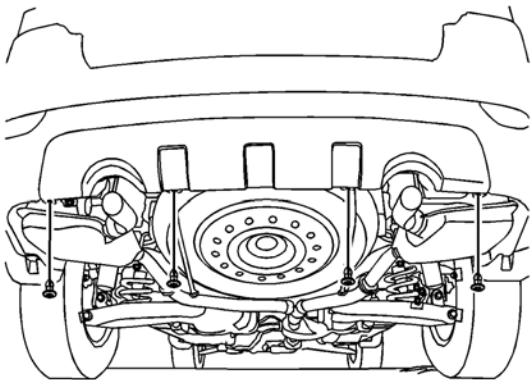

4. Remove the rear lower fascia retainers.
5. Remove the fascia.