



# Front Side Door Window Replacement

## Removal Procedure

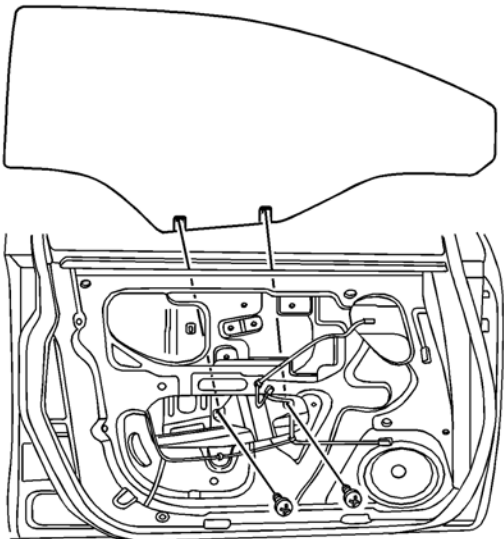

1. Remove the front door trim. Refer to [Front Side Door Trim Panel Replacement](#) .
2. Remove the front side door window frame rear applique. Refer to [Front Door Frame Applique Replacement](#) .
3. Remove the screws that secure the glass to the window regulator.
4. Remove the glass from the door.

## Installation Procedure

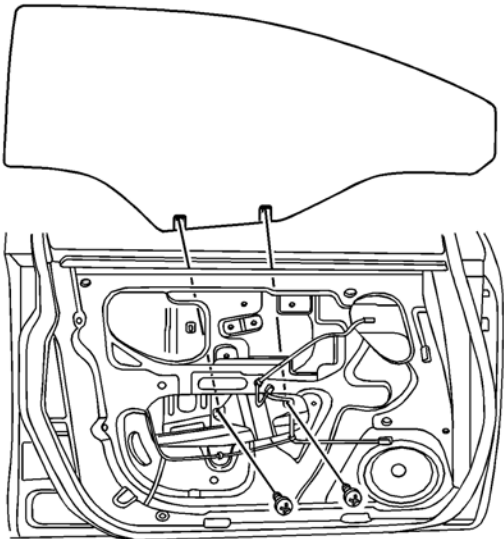

1. Install the glass in the door and position the glass within the window regulator.

**Notice:** Refer to [Fastener Notice](#) in Cautions and Notices.

2. Install the glass to the window regulator with the screws.

### Tighten

Tighten the glass screws to 3 N·m (27 lb in).

3. Install the front side door window frame rear applique. Refer to [Front Door Frame Applique Replacement](#) .
4. Install the front door trim. Refer to [Front Side Door Trim Panel Replacement](#) .