



Instrument Panel Assembly Replacement (C100/Long Body)

Removal Procedure


Caution: Refer to [Battery Disconnect Caution](#) in the Preface section.

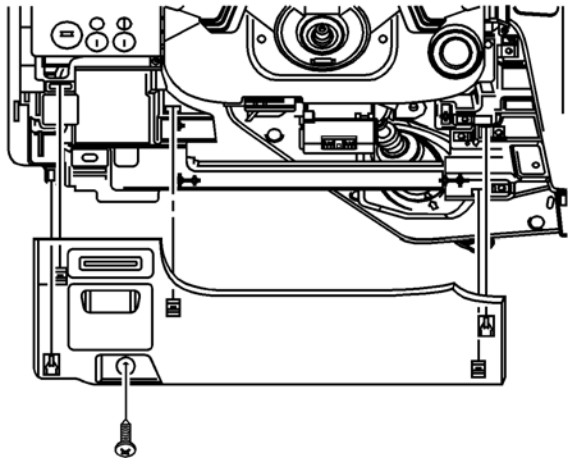

1. Disconnect the negative battery cable. Refer to [Battery Negative Cable Disconnection and Connection](#) .
2. Remove the instrument panel lower left trim. Refer to [Instrument Panel Lower Trim Panel Replacement - Left Side](#) .
3. Remove the front, rear floor console. Refer to [Console Replacement](#) .
4. Remove the ambient light sensor . Refer to [Ambient Light Sensor Replacement](#) .
5. Remove the radio . Refer to [Radio Replacement](#) .
6. Remove the headlamp leveling switch assembly. Refer to [Headlamp Leveling Switch Replacement](#) .
7. Remove the instrument cluster trim panel.
8. Remove the automatic temperature controls assembly. Refer to [Heater and Air Conditioning Control Replacement](#) .
9. Remove the instrument cluster. Refer to [Instrument Cluster Replacement](#) .
10. Remove the kick panels.
11. Disconnect the necessary instrument compartment electrical connectors.
12. Remove the knee bolster. Refer to [Knee Bolster Replacement](#) .

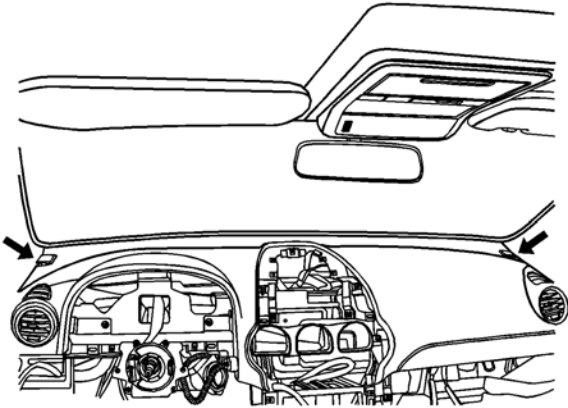

13. Remove the left and right upper instrument panel bolt covers.
14. Remove the body control module. Refer to [Body Control Module Replacement](#) .

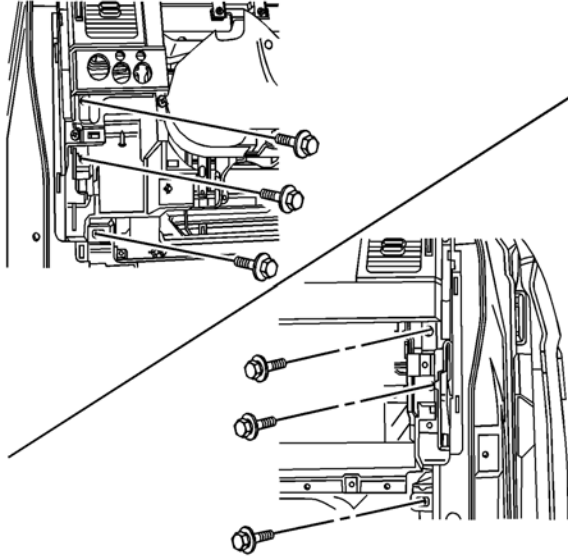

15. Remove the nuts and the bolts securing the steering column and lower the steering column. Refer to [Steering Column Replacement](#)