



# Windshield Garnish Molding Replacement

## Removal Procedure

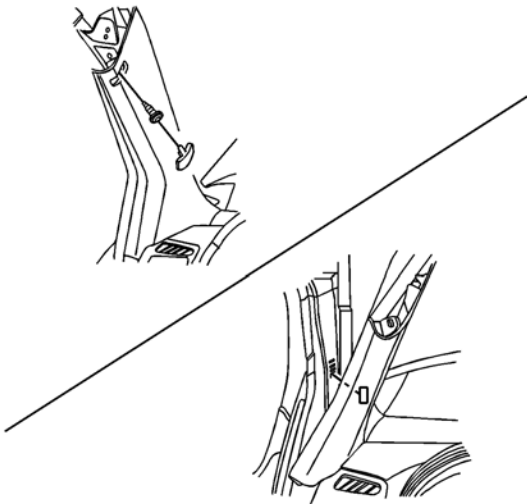

Remove the bolt and the windshield garnish molding.

## Installation Procedure

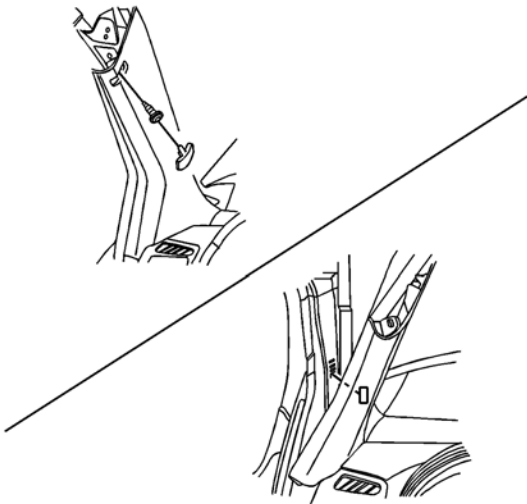

**Notice:** Refer to [Fastener Notice](#) in Cautions and Notices.

Install the windshield garnish molding with the bolt.

**Tighten**  
Tighten the windshield garnish molding bolt to 2 N·m (18 lb in).