



Front Seat Adjuster Replacement

Removal Procedure

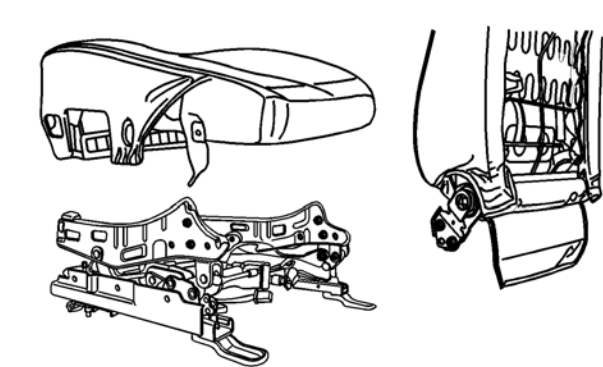

1. Remove the seatback. Refer to [Seat Back Replacement - Front](#) .
2. Remove the seat trim. Refer to [Front Seat Trim Panel Replacement](#) .
3. Remove the seat cushion bolts.
4. Remove the seat track from the seat cushion.

Installation Procedure

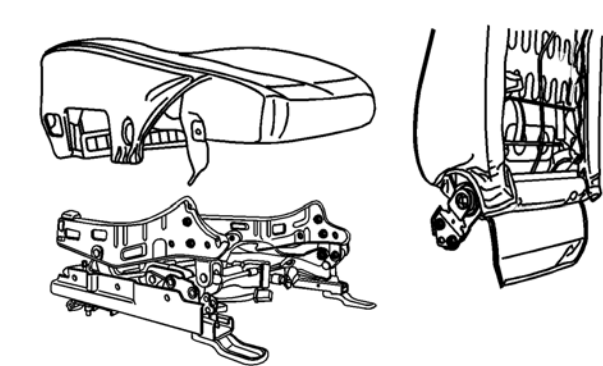

1. Install the cushion onto the seat track.
2. Install the seat track to the seat cushion with the seat cushion bolts.

Notice: Refer to [Fastener Notice](#) in Cautions and Notices.

Tighten
Tighten the front seat cushion bolts to 12 N·m (9 lb ft).

3. Install the seat trim. Refer to [Front Seat Trim Panel Replacement](#) .
4. Install the seatback. Refer to [Seat Back Replacement - Front](#) .