



- 7. Remove the front fascia from the front fender by pulling the side of the fascia outward.
- 8. Remove the front fascia from the vehicle.

Installation Procedure

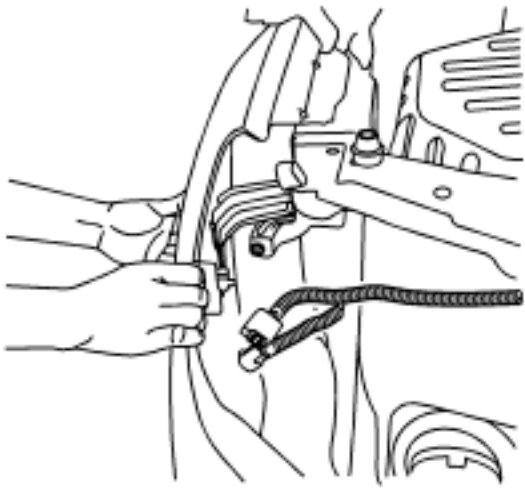

- 1. Install the front fascia to the vehicle.
- 2. Install the side of the front fascia on the front fender.

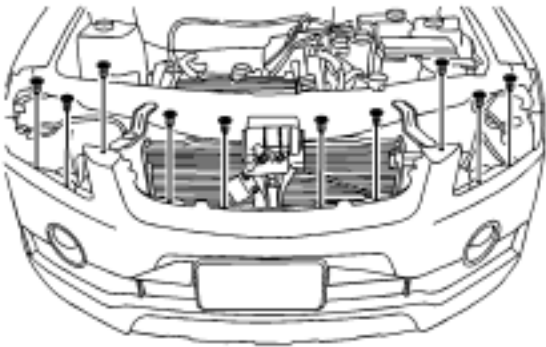

- 3. Install the upper fascia retainers.
- 4. Install the grille. Refer to [Grille Replacement](#).

**Notice:** Refer to [Fastener Notice](#) in the Preface section.