



Front Fender Replacement (C 105/Short Body)


Removal Procedure

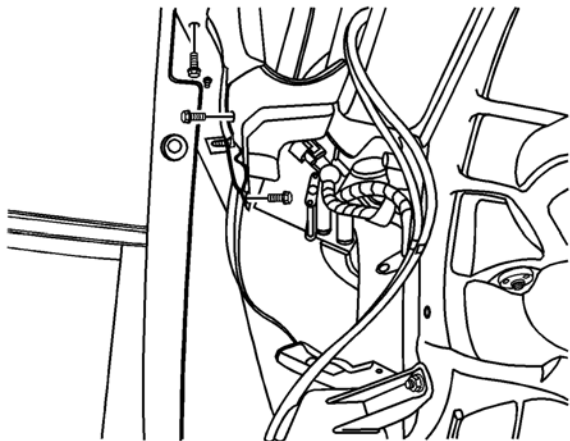

1. Remove the front fender liner. Refer to [Fender Liner Replacement](#) .
2. Remove the bolts securing the front fascia to the fender.

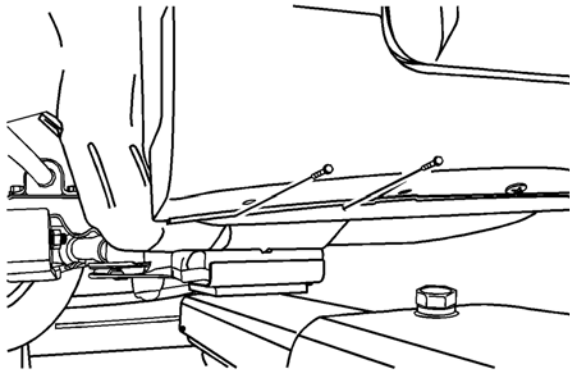

3. Reposition the front fascia.
4. Remove the fender bolts behind the front fascia.
5. Remove the rocker panel molding. Refer to [Rocker Panel Molding Replacement](#) .
6. Remove the bolts at the base of the fender.

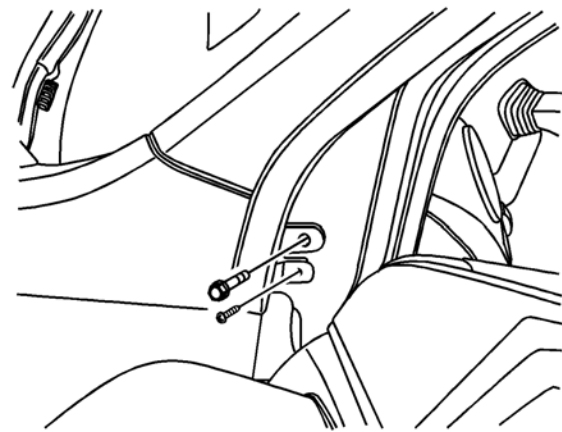

7. Open the front door and remove the bolt at the base of the A-pillar.