



Resonator Replacement (2.4L)


Removal Procedure

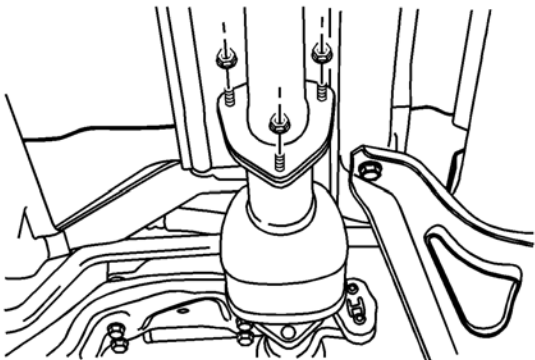

1. Remove the nuts and the gasket from the front muffler pipe-to-underbody catalytic converter (UCC).

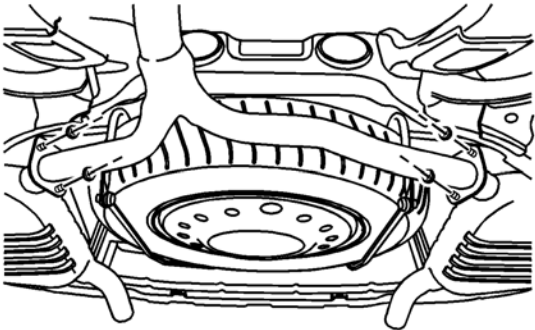

2. Remove the nuts and the gaskets from the both rear muffler pipe flange.

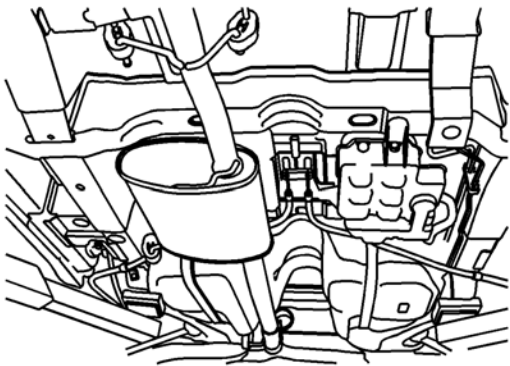

3. Disconnect the front muffler from the rubber hangers.
4. Remove the front muffler.
5. Check the UCC and the front muffler for holes, damage, open seams or other deterioration which could permit exhaust fumes to seep into the passenger compartment or the trunk.

Installation Procedure